



"D12BAF" SERIES COSTECH FANS IP55

Description: **с.с. axial fan 120x120x38 mm**

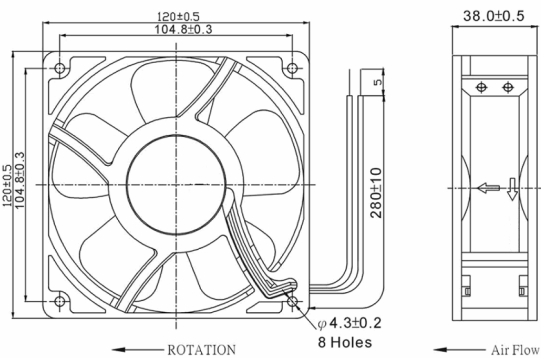

- Casing material:** Black fibreglass reinforced plastic (PBT) UL 94V-0
- Impeller material:** Black fibreglass reinforced plastic (PBT) UL 94V-0
- Protection degree:** IP55, according to EN 60529 standard
- Fixing system:** by No. 4 M4 screws
- Motor protection:** IC
- Storage temperature:** from -40°C to +70°C
- Rated temperature range:** from -10°C to +70°C
- Lifetime L10 at 40°C:** 70,000 h
- Electrical connection:** 2 leads 24AWG UL 1007, 280 mm long
- Weight:** 290 g

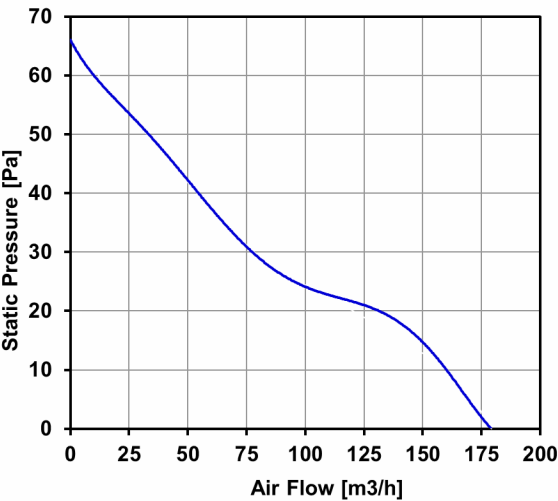

Model	Bearing	Voltage	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
D12B04HWBAF0	Ball	12 V d.c.	0.500	6.0	179	66	46.7	2,800	CE
D12B05HWBAF0	Ball	24 V d.c.	0.320	7.7	179	66	46.7	2,800	CE
D12B07HWBAF0	Ball	48 V d.c.	0.200	9.6	179	66	46.7	2,800	CE