

YNF-III SERIES



3-Aluminum



YNF915B4-077-00/02
(3 blades, plastic body)

3-Aluminum



YNF915B4-077-01
(3 blades, plastic body)

5-Aluminum



YNF915B4-081-01
(5 blades, plastic body)

6-Aluminum



YNF915B4-081-00
(6 blades, plastic body)





ADVANTAGES

► Long durability

LLDPE polyethylene resin frame, with strong tensile and tear strength resistance, particularly superior with cold and heat resistance, will never corrodes and rusts, solid and durable.

► Easy to install

Light weight, simple structure, easy to hold and install.

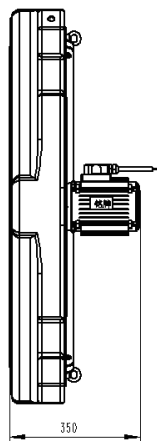

Model No.		YNF915B4-077-00	YNF915B4-077-01	YNF915B4-077-02	YNF915B4-081-01	YNF915B4-081-00
Diameter of blades (inch)		36"			36"	
Motor*	Voltage (V)	380	230 / 460	380	230 / 460	
	Hertz (Hz)	50	60	50	60	
	Phase	3	3	3	3	
		*Above models' options include other voltages not mentioned above, 3 phase, 50Hz or 60Hz				
Performance	Power (KW)	0.25		0.37		
	Speed (RPM)	710	850	710	850	
		Airflow	(m $\wedge$ 3/hr.)	(cfm)	(m $\wedge$ 3/hr.)	(cfm)
			20800	12125	23200	13655
Features	Air velocity @ 6 M (m/s)	3.3		4.5	4.8	
	Drive	Direct Drive				
Dimension (mm)	Propeller	3-Aluminium		5-Aluminium	6-Aluminium	
	WxDxH	1050x340x1050		1050x340x1050		