

AC Forward Centrifugal Blower




Product Characteristic


Ø133

- Type of Protection : IP54
- Insulation Class: “B” “F”
- Mode of operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp: -40~+60 °C

Flow Rate Curve

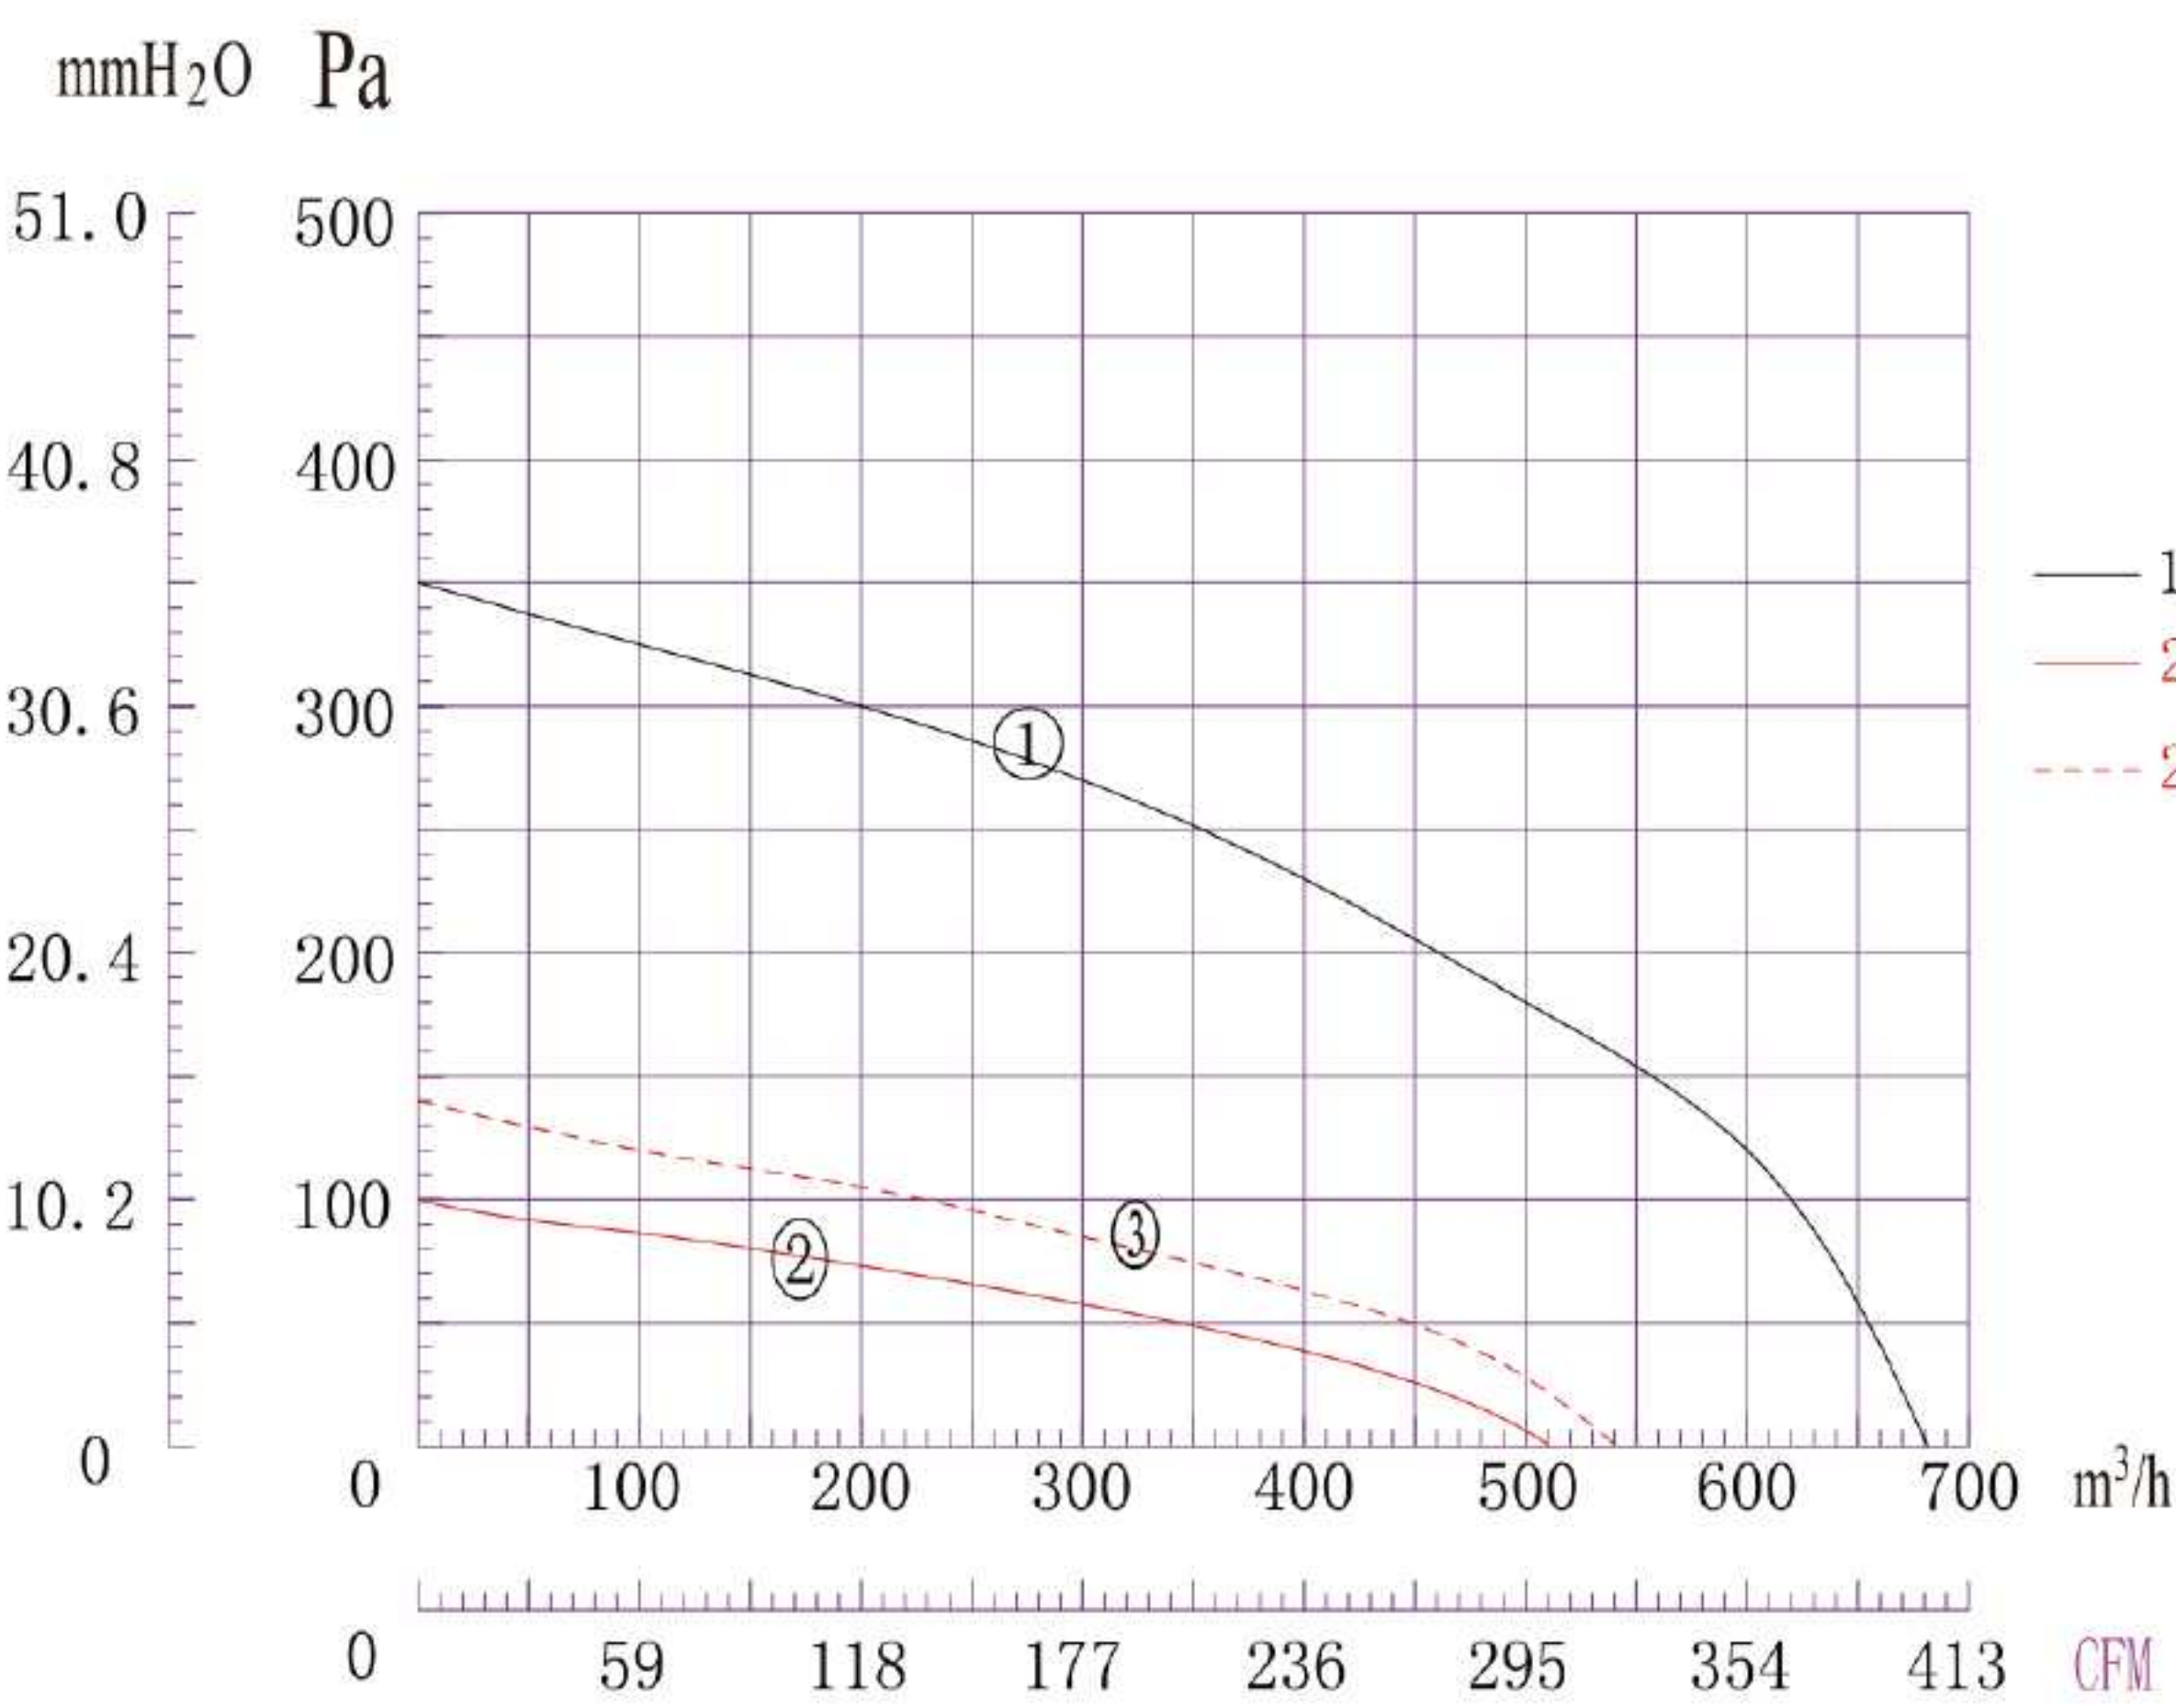

Product Drawing

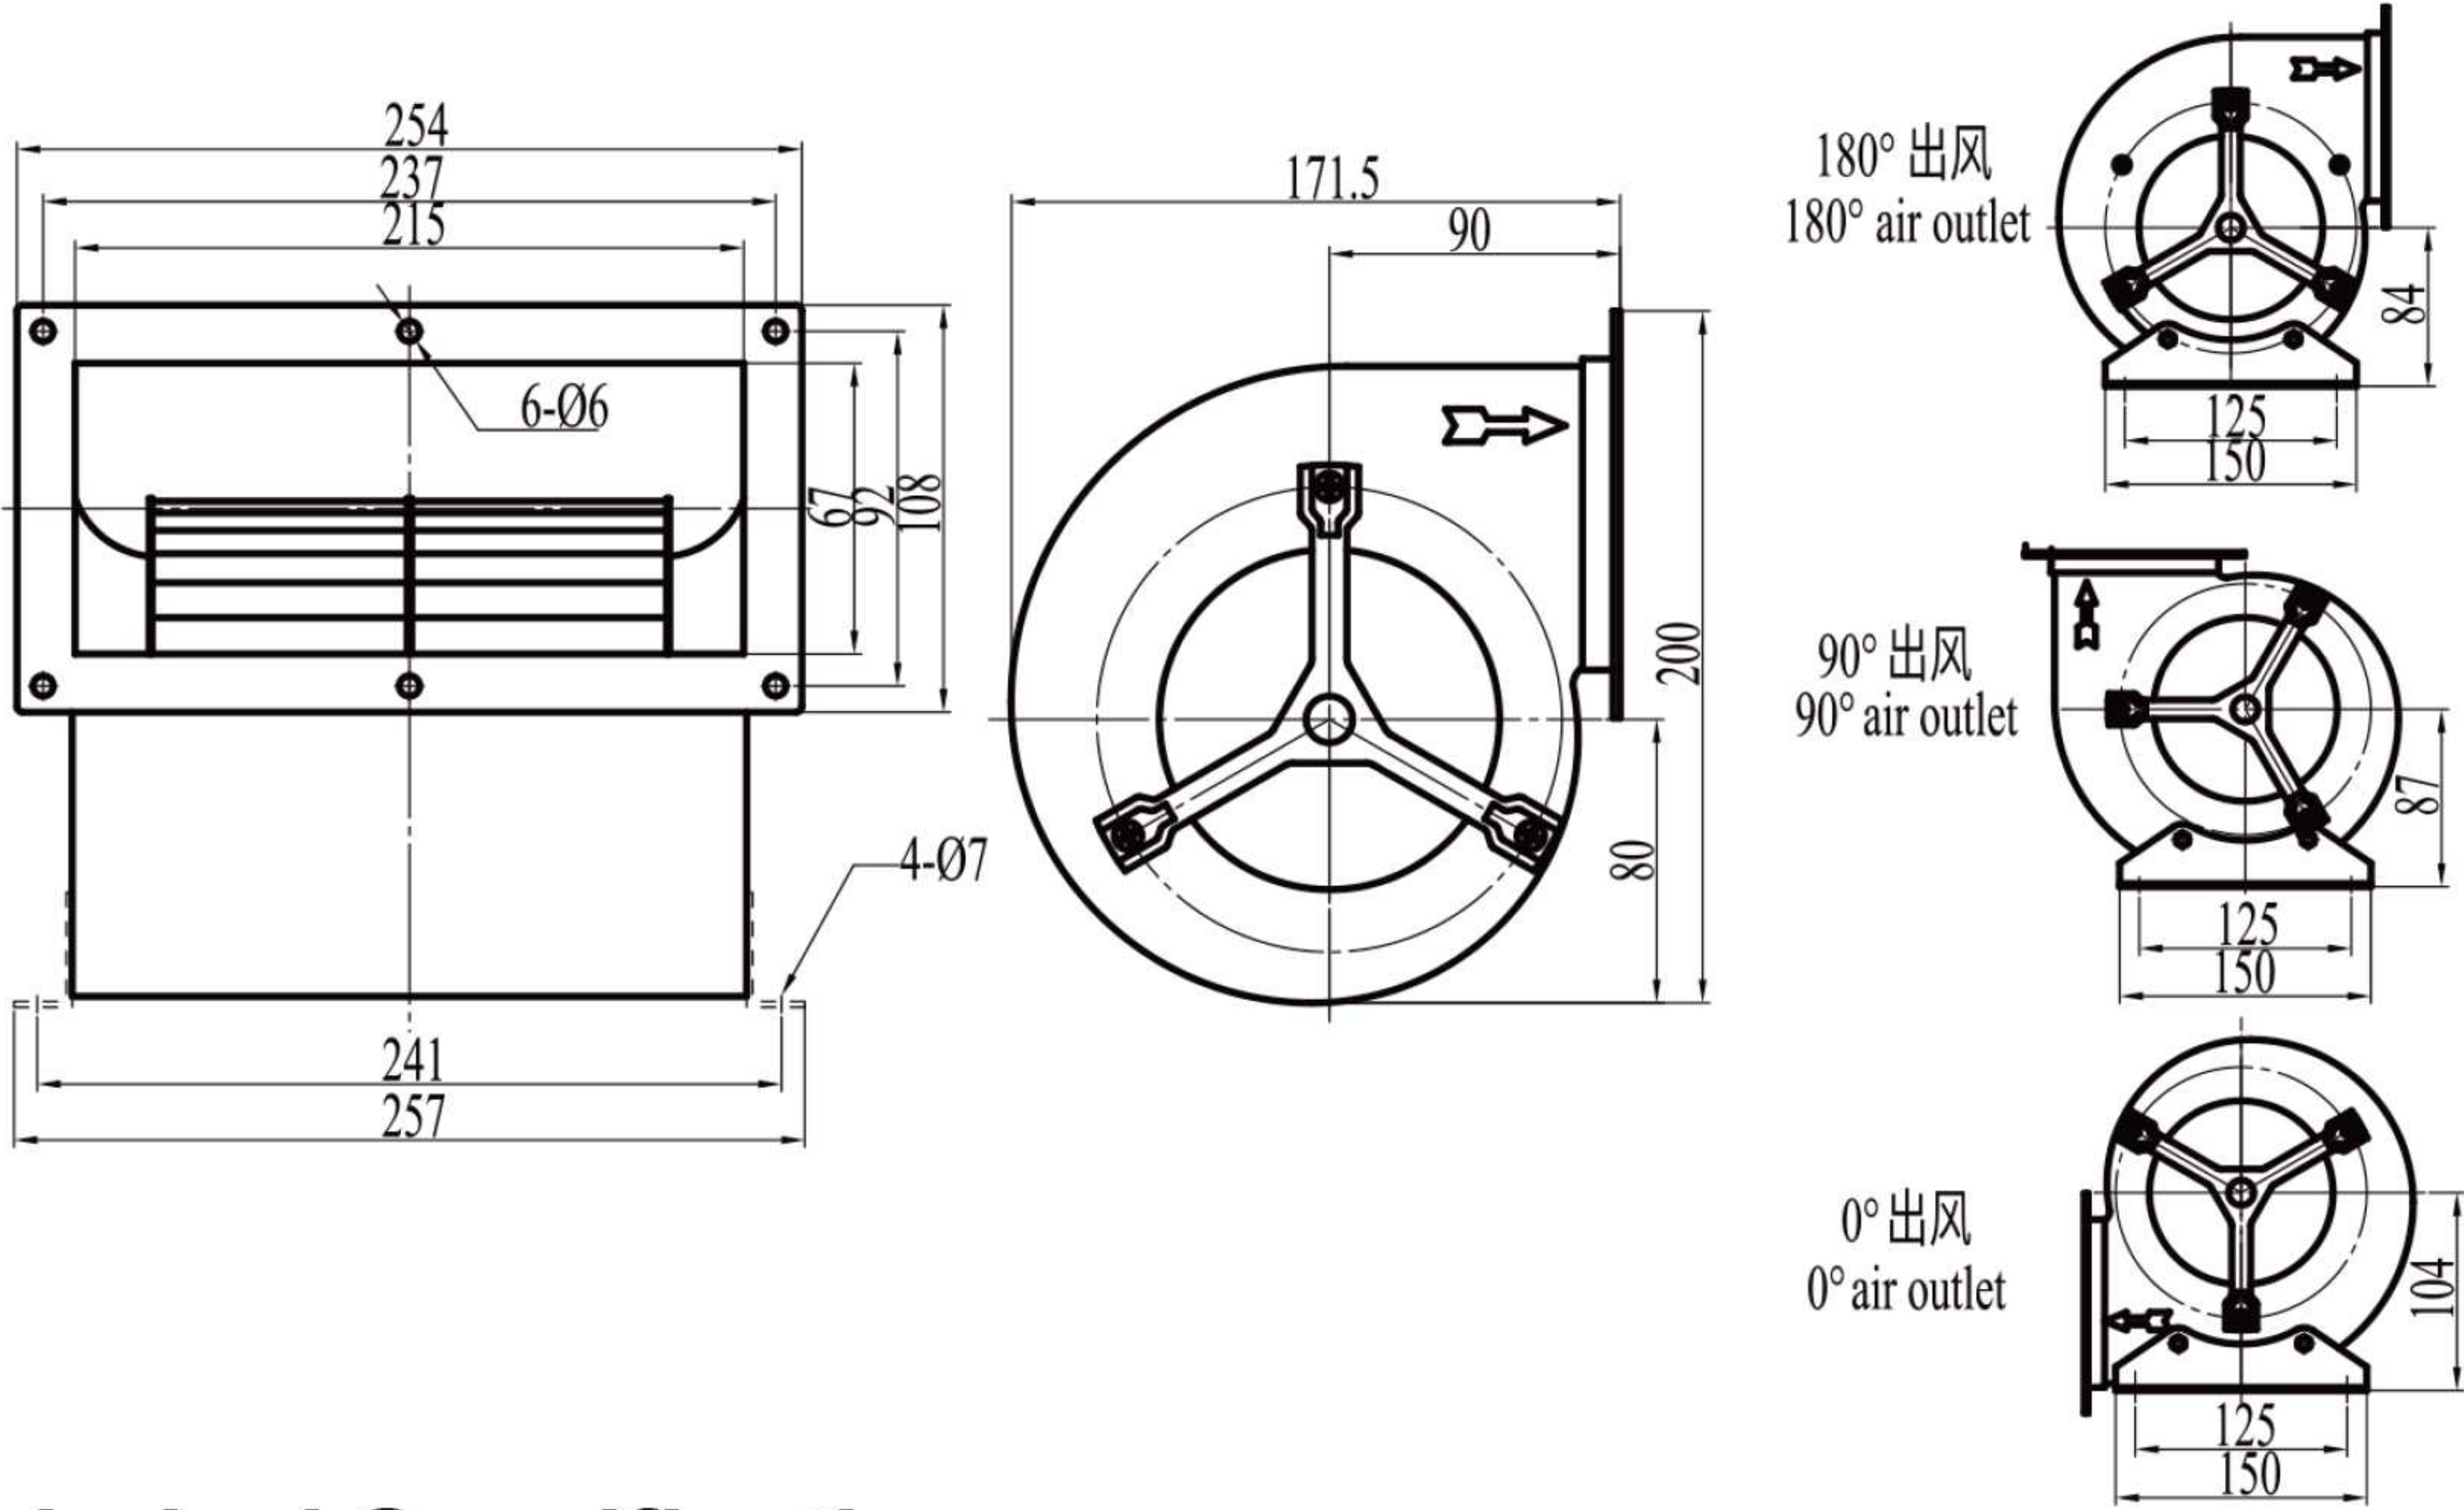

Technical Specifications

Model	Voltage	Frequency	Current	Power	Speed	Air Flow	Noise Level	Capacitor	Curve
LWFA2E-133DS-01	220V	50Hz	1.30A	280W	1950RPM	680m³/h	60dB(A)	8µF	①
LWFA4E-133DS-02	220V	50Hz	0.35A	70W	1380RPM	510m³/h	53dB(A)	2µF	②
LWFA4E-133DS-03	230V	60Hz	0.40A	90W	1650RPM	540m³/h	55dB(A)	2µF	③

AC Forward Centrifugal Blower




Product Characteristic


Ø133

- Type of Protection : IP54
- Insulation Class: “B” “F”
- Mode of operation: S1
- Bearings: Maintenance-free ball bearings
- Blades: Galvanized sheet
- Perm.amb.temp: -40~+60 °C

Flow Rate Curve

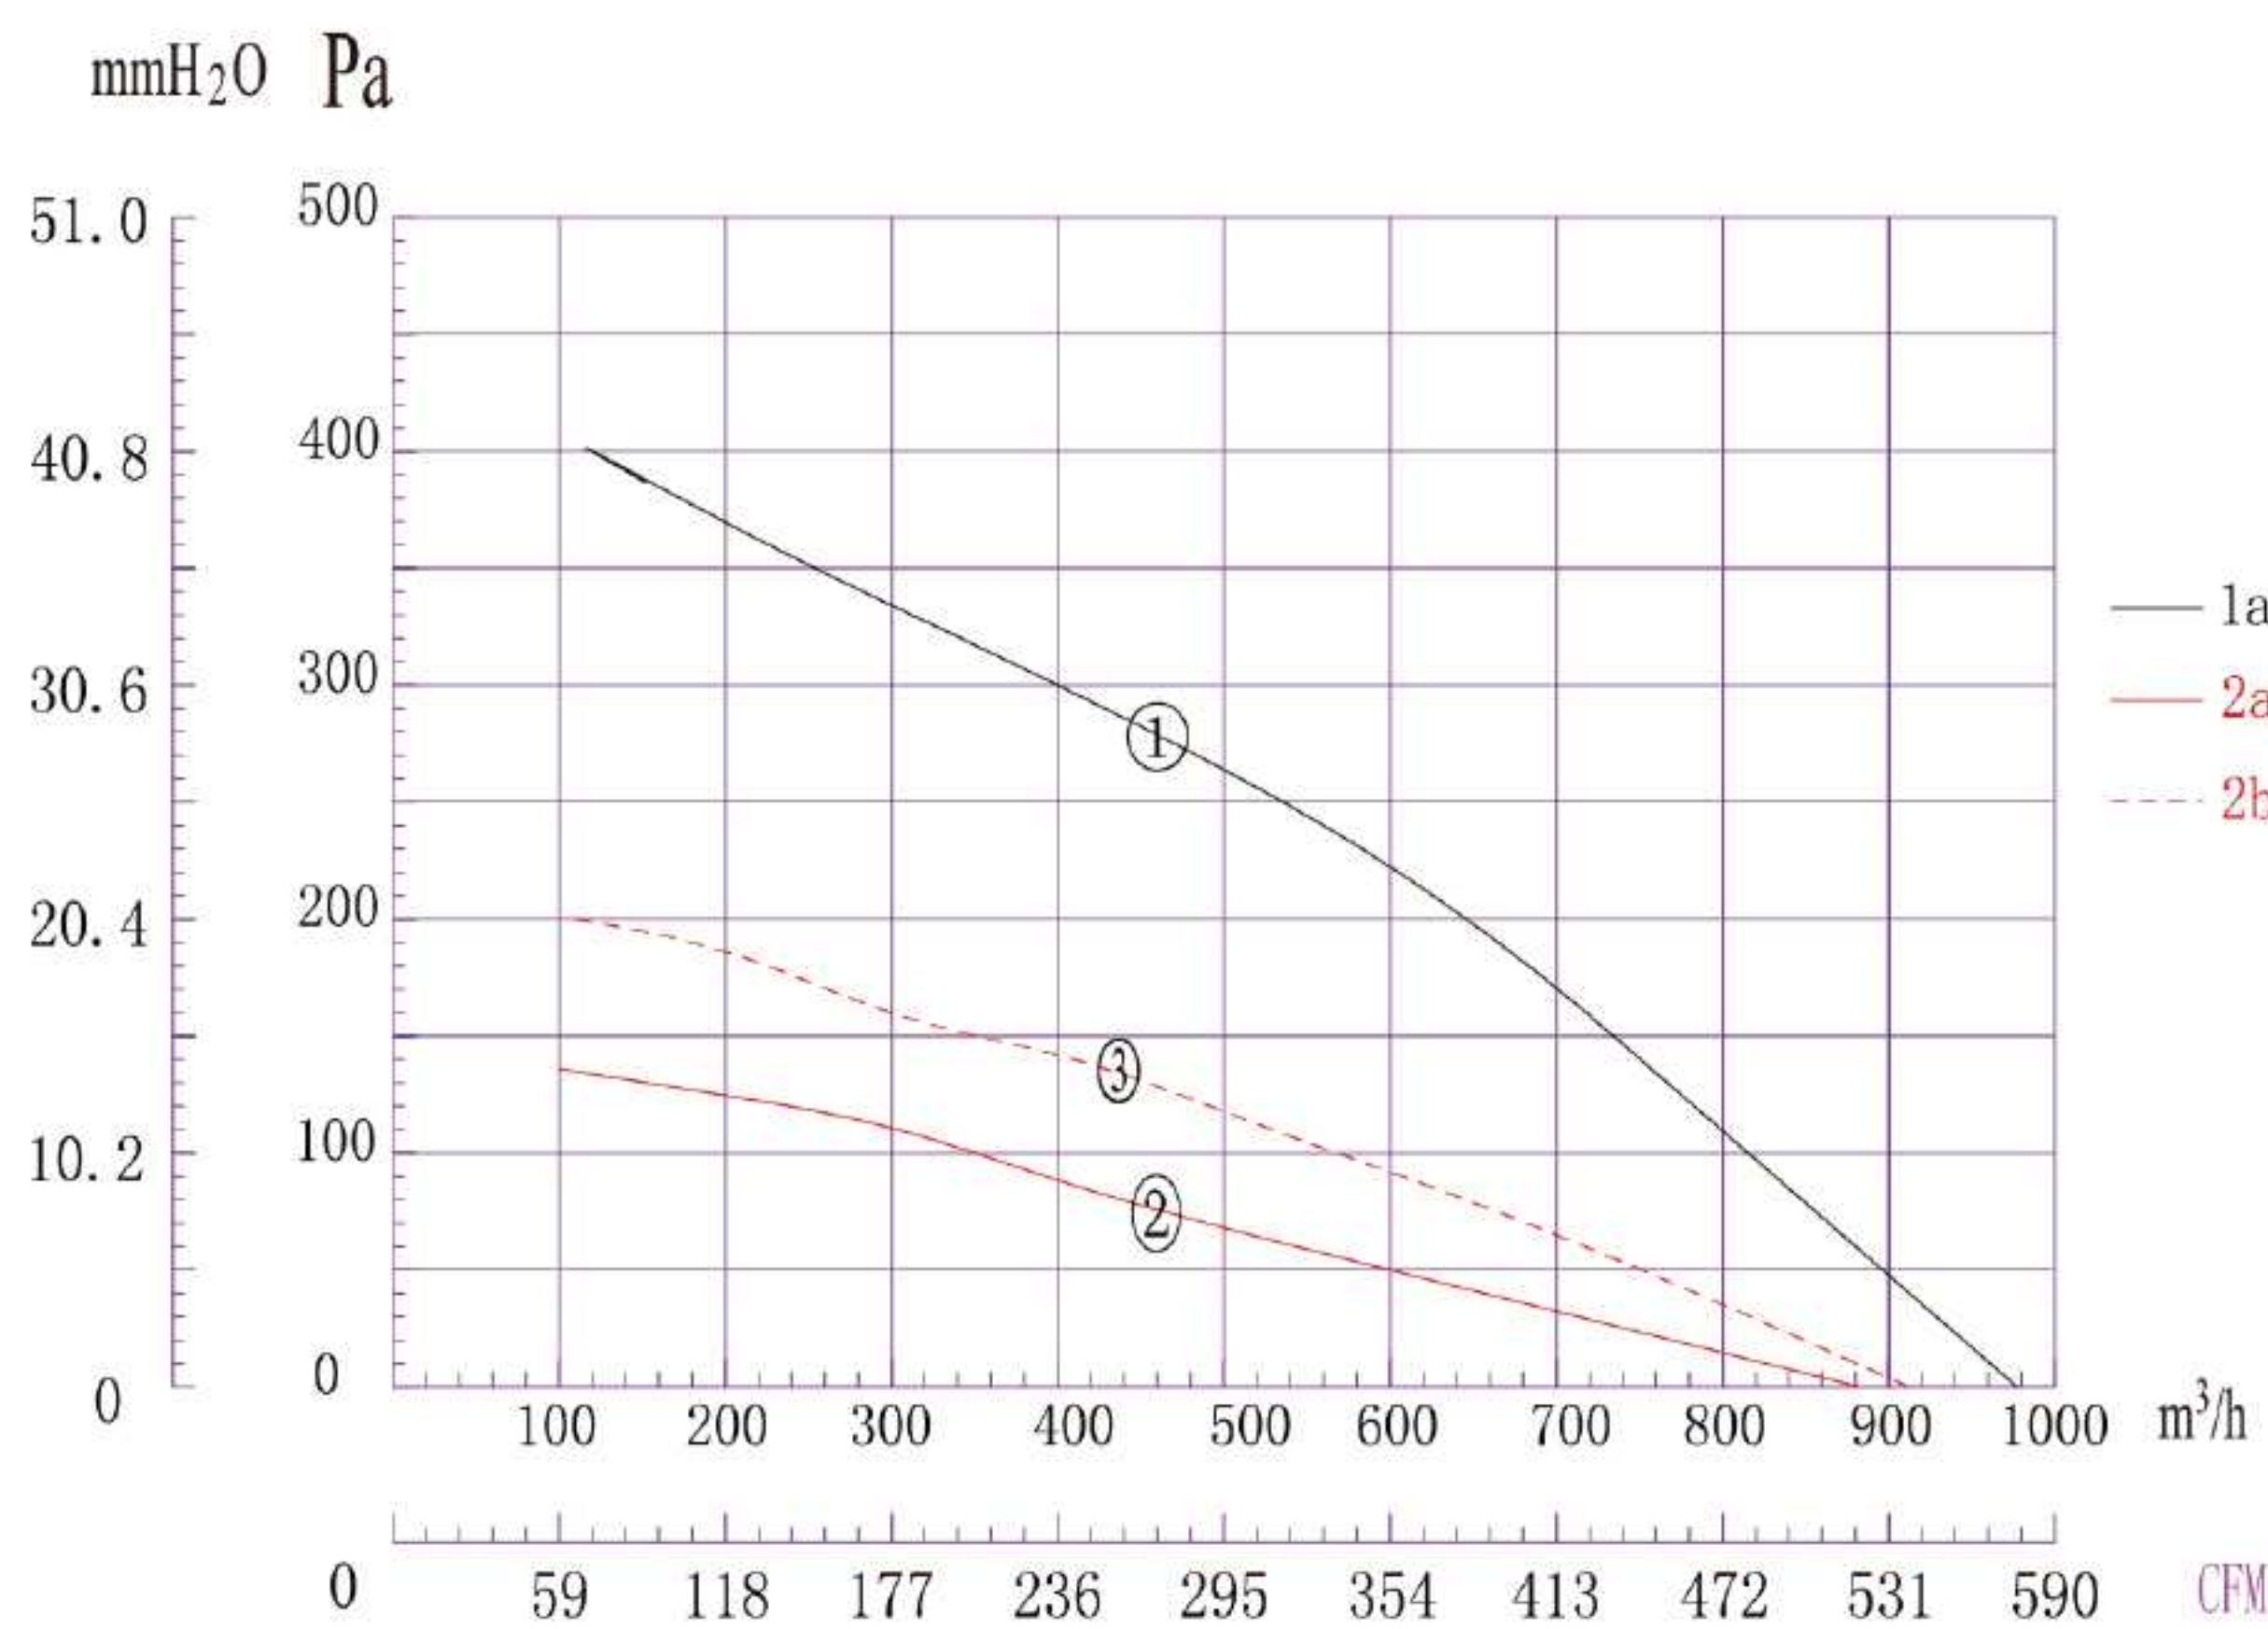

Product Drawing

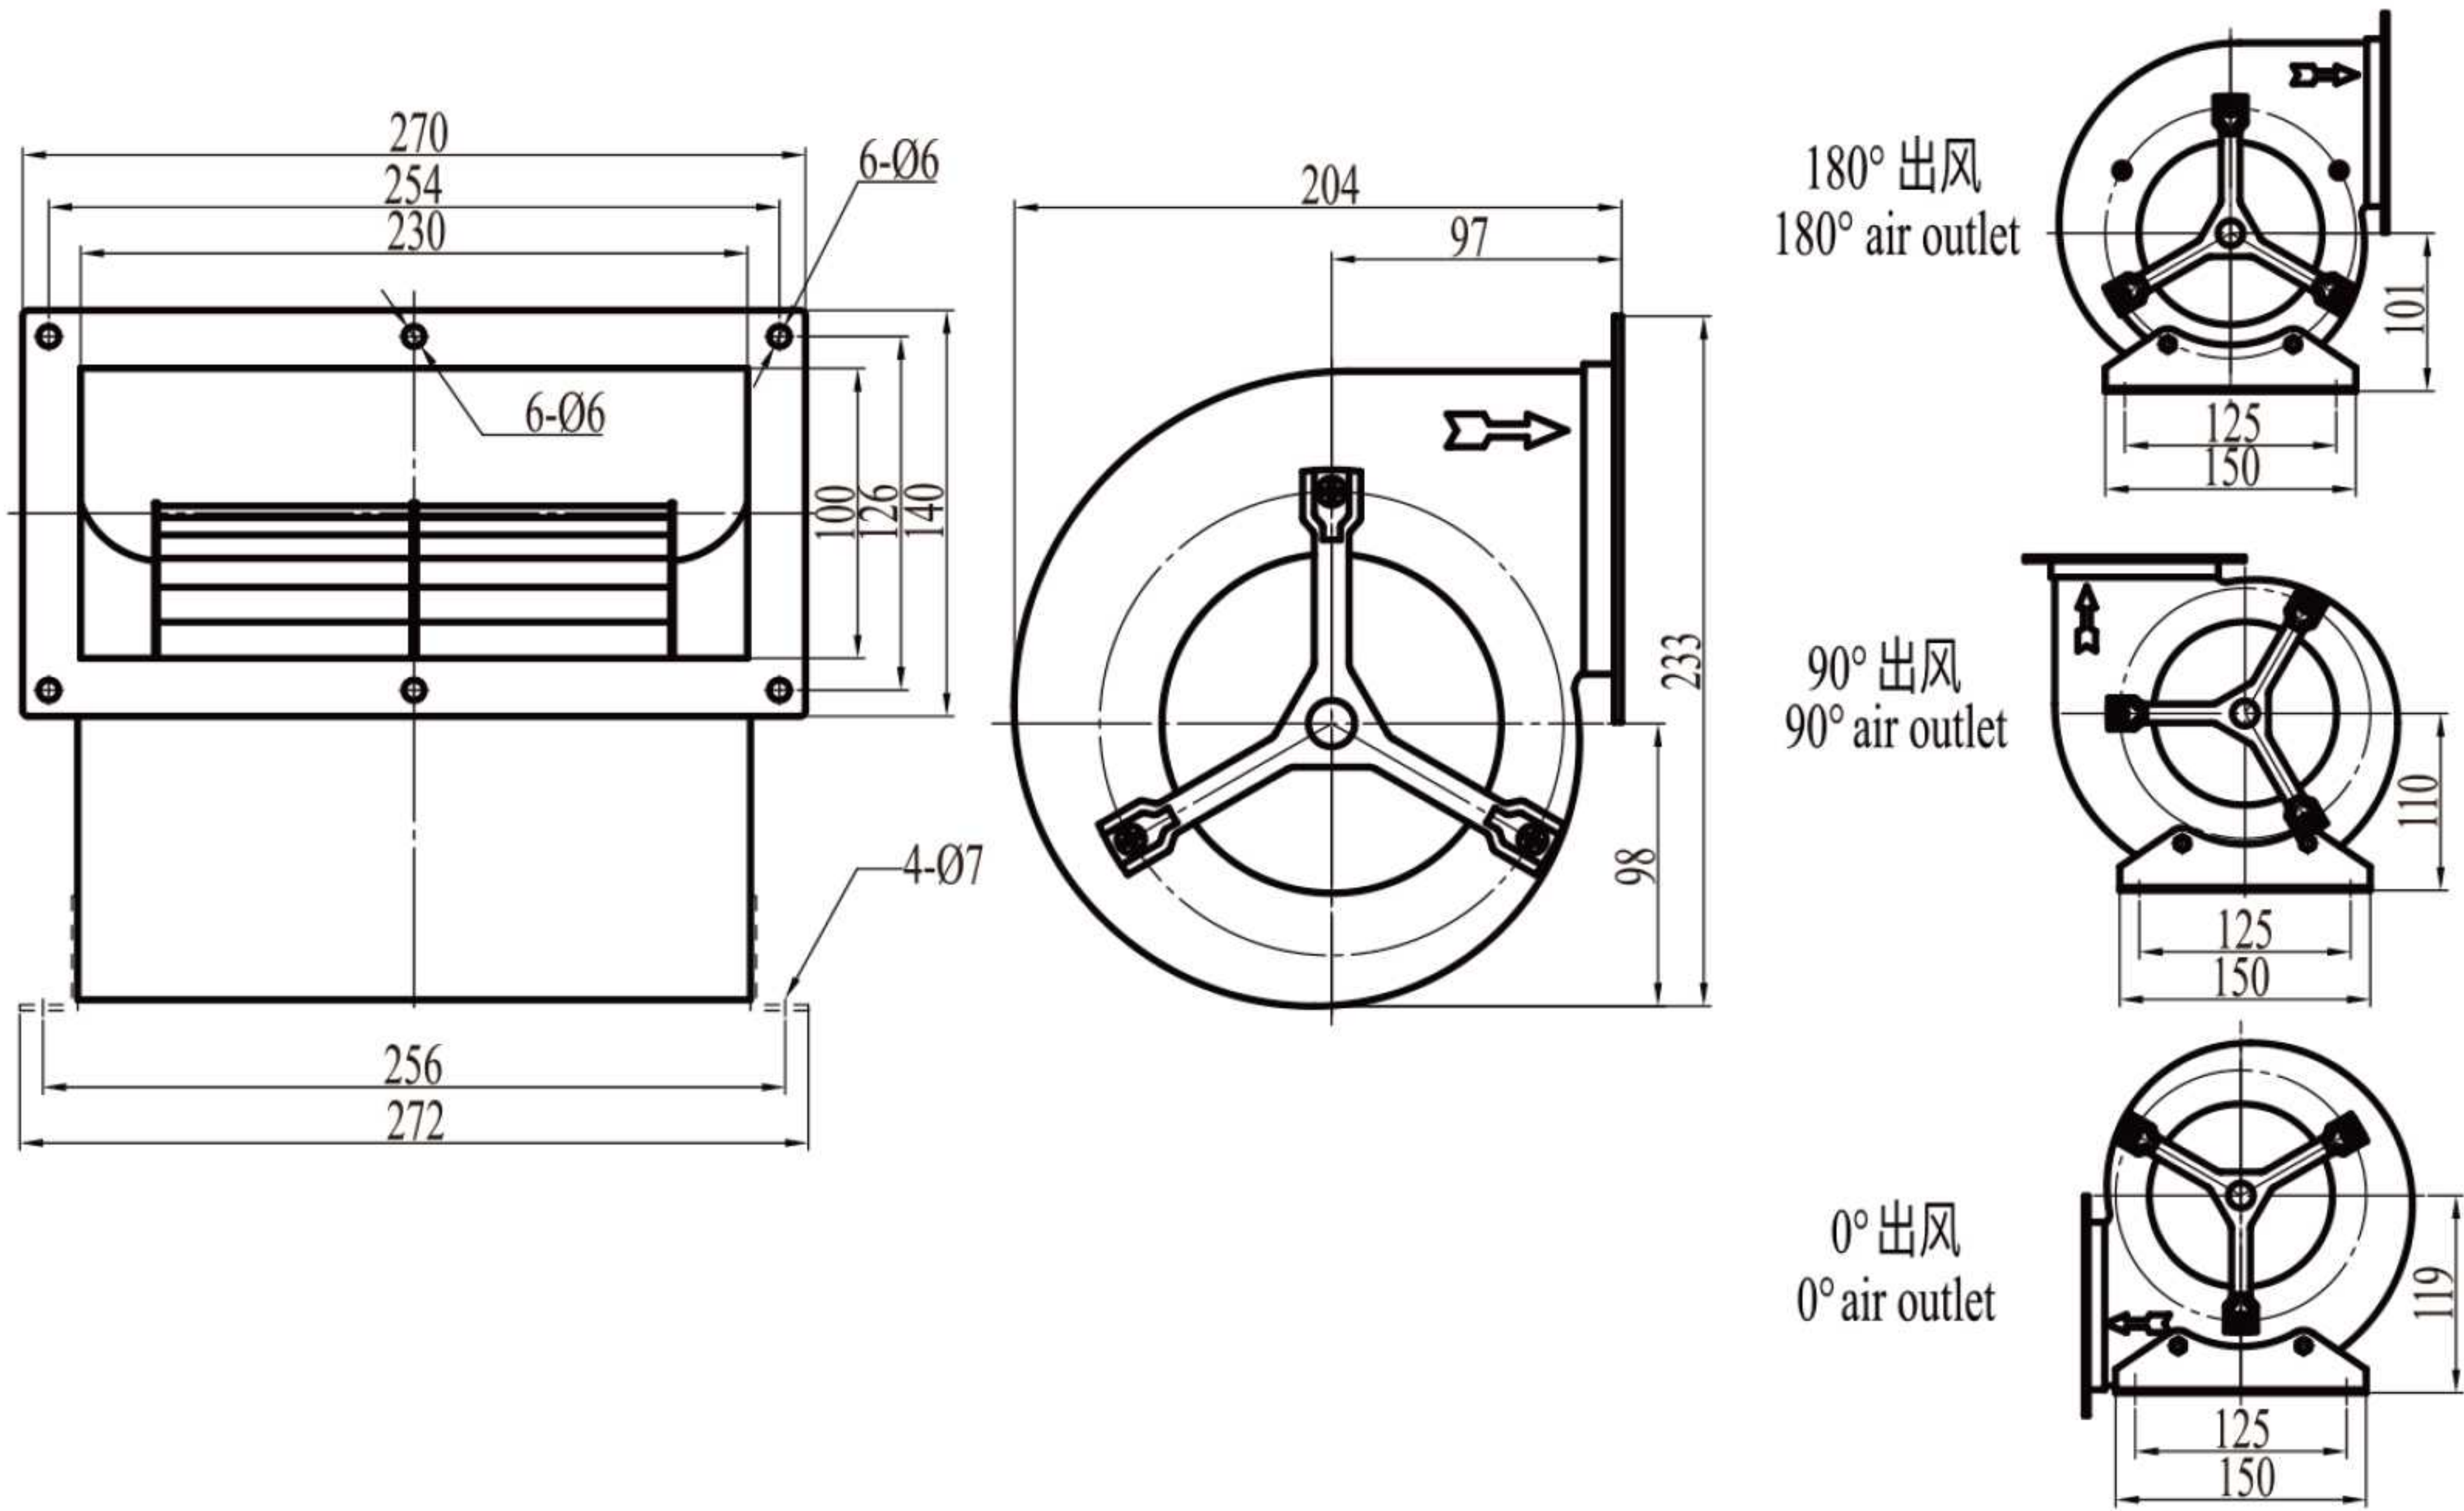

Technical Specifications

Model	Voltage	Frequency	Current	Power	Speed	Air Flow	Noise Level	Capacitor	Curve
LWFA4E-133DS-04	220V	50Hz	1.42A	305W	2100RPM	970m³/h	63dB(A)	20µF	①
LWFA4E-133DS-05	220V	50Hz	0.38A	82W	1425RPM	873m³/h	53dB(A)	3µF	②
LWFA4E-133DS-06	230V	60Hz	0.55A	125W	1650RPM	910m³/h	55dB(A)	4µF	③