


LWCA-30 Series

Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃



Product Drawing

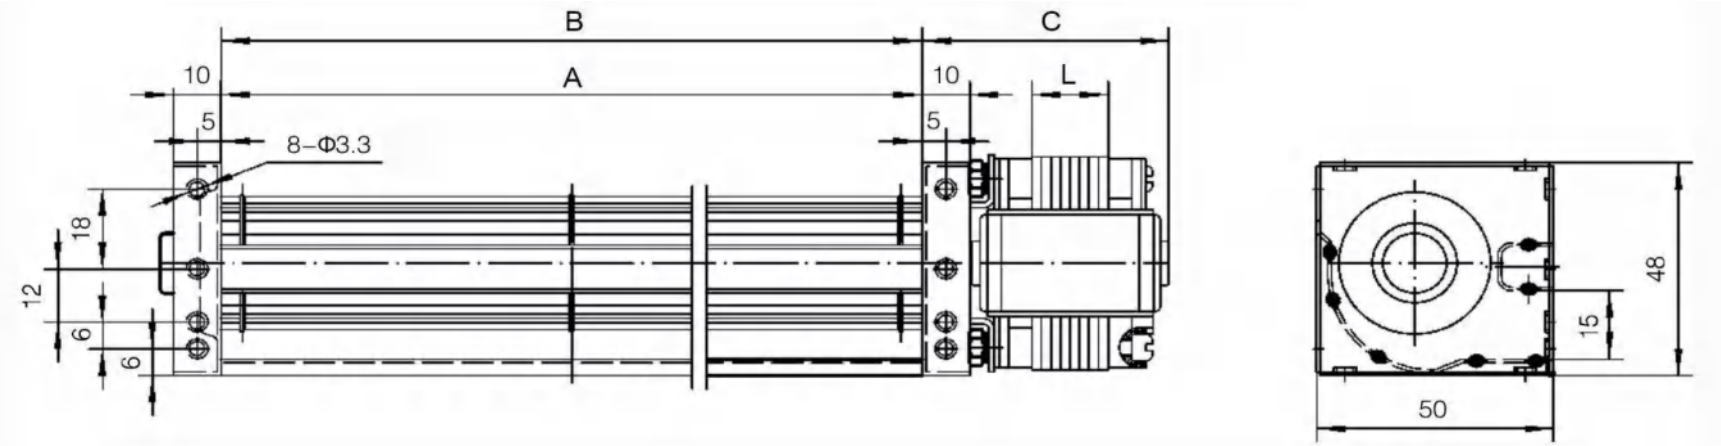

Technical Specifications

Model	Dimension(mm)			Voltage	Frequency	Power	Speed	Pressure	Airflow	Noise	Blower
	A	B	C								
LWCA-30120SN-01	120	120	46	220	50	8	2500	0.7/7	22	37	Single
LWCA-30180SN-01	180	180	46	220	50	9	2700	1.2/12	46	38	Single
LWCA-30240SN-01	240	240	51	220	50	12	2600	1.3/13	62	39	Single
LWCA-30300SN-01	300	300	55	220	50	15	2700	1.4/14	83	40	Single
LWCA-30360SN-01	360	360	55	220	50	18	2600	1.4/14	95	42	Single


LWCA-30 Series

Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃



Product Drawing

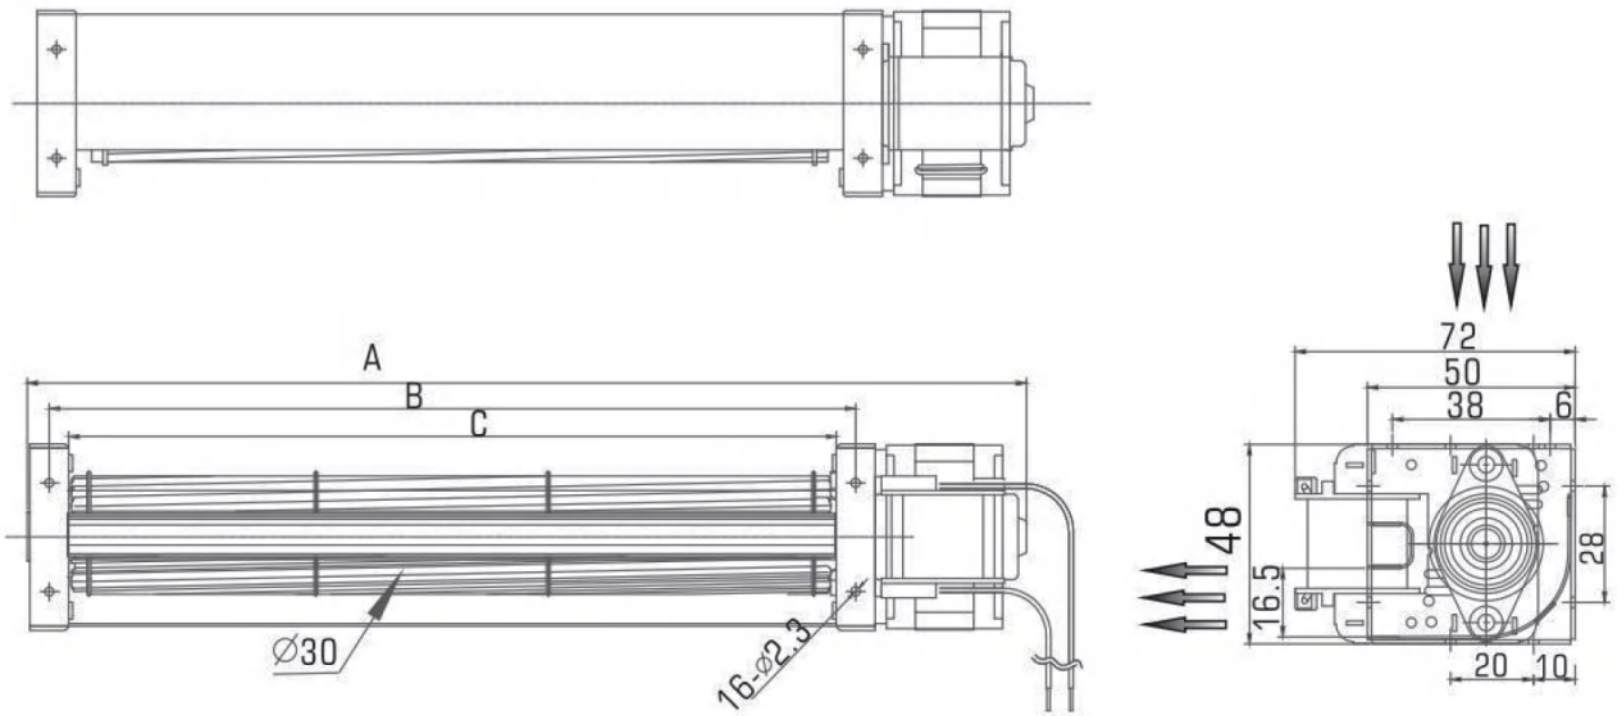

Technical Specifications

Model	Dimension(mm)			Voltage	Frequency	Power	Speed	Pressure	Airflow	Noise	Blower
	A	B	C								
LWCA-3090UN-01	158	108	98	120	60	15.3	3300	11	25	31	Single
LWCA-3090SN-02				230	50	13.5	2700	10	20	31	Single
LWCA-30150UN-01	222	170	160	120	60	16.5	3200	11	48	32	Single
LWCA-30150SN-02				230	50	13.4	2700	10	41	32	Single
LWCA-30190UN-01	256	208	198	120	60	15.8	3100	13	60	32	Single
LWCA-30190SN-02				230	50	13.7	2600	10	50	32	Single
LWCA-30250UN-01	308	258	248	120	60	16.3	3000	14	76	32	Single
LWCA-30250SN-02				230	50	14.4	2500	10	62	32	Single
LWCA-30290UN-01	365	310	300	120	60	16.7	2900	15	90	34	Single
LWCA-30290SN-02				230	50	14.4	2500	13	81	34	Single
LWCA-30350UN-01	411	362	352	120	60	16.9	2780	15	106	35	Single
LWCA-30350SN-02				230	50	14.4	2500	14	96	35	Single