


LWCA-48 Series

Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 C ~ +60 C



Product Drawing

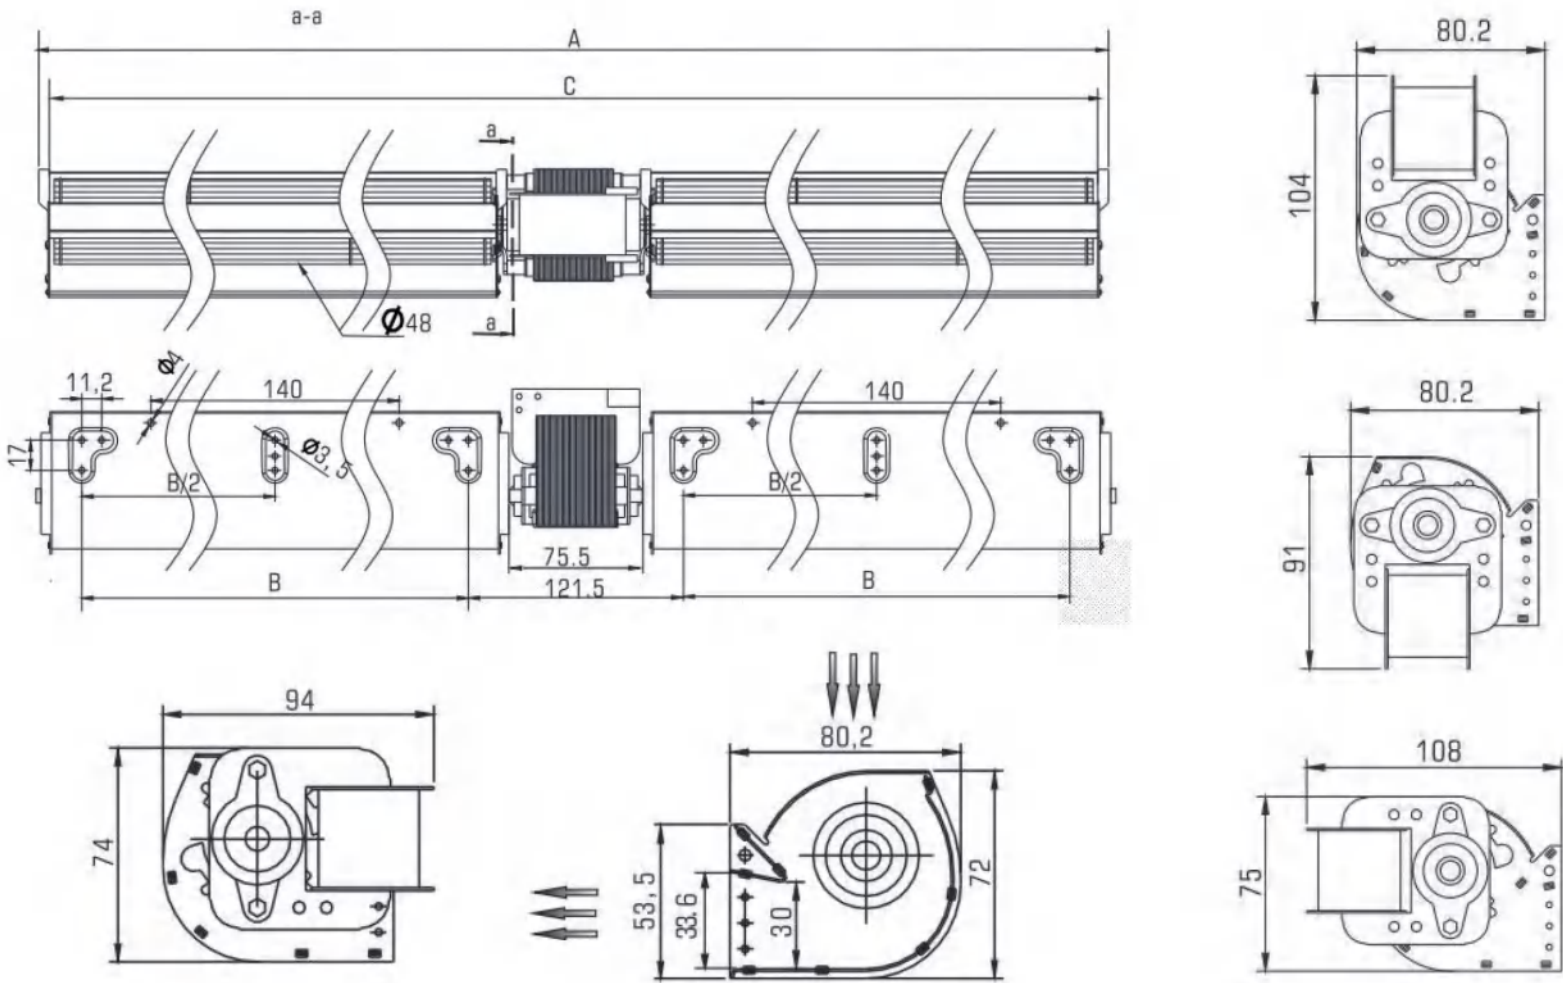

Technical Specifications

Model	Dimension(mm)			Voltage	Frequency	Power	Speed	Pressure	Airflow	Noise	Blower
	A	B	C								
LWCA-48240SN-02	584	208	572	220	50	43	2300	34	370	42	Double
LWCA-48300SN-02	706	269	694	220	50	46	2100	33	350	40	Double
LWCA-48350SN-02	796	314	784	220	50	47	1500	28	280	38	Double
LWCA-48420SN-02	936	384	924	220	50	47	1350	25	270	36	Double


LWCA-50 Series

Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 C ~ +60 C



Product Drawing

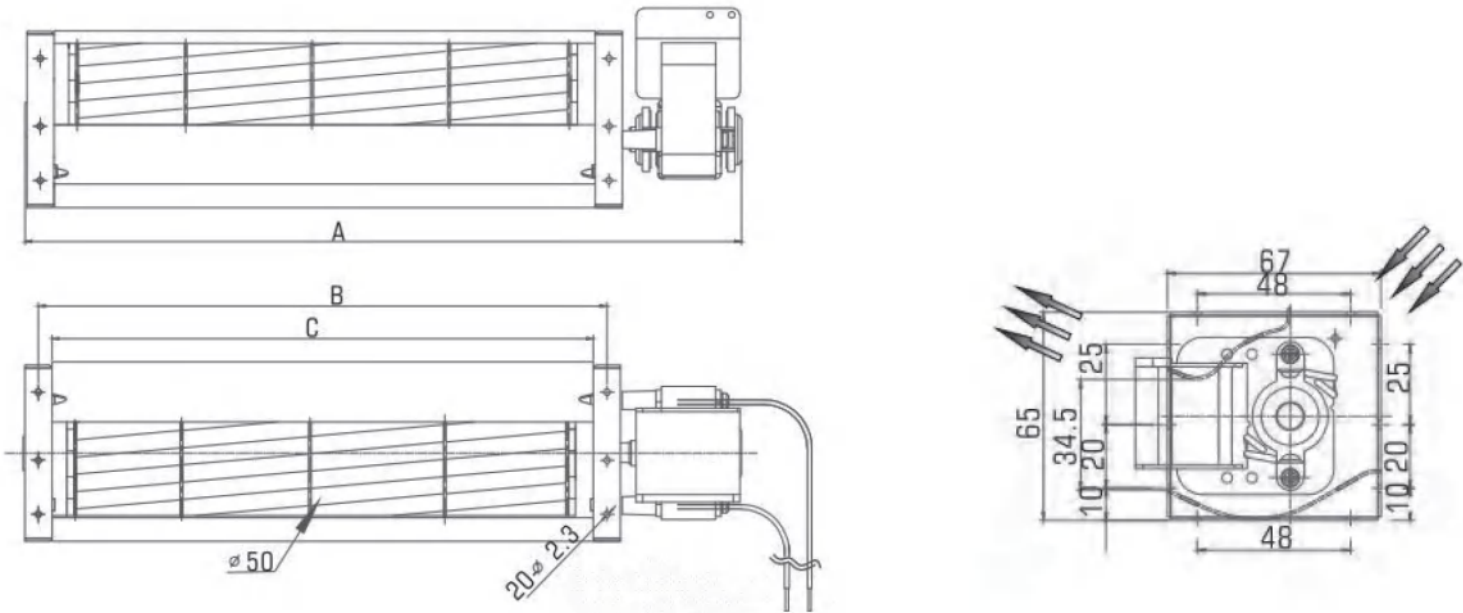

Technical Specifications

Model	Dimension(mm)			Voltage	Frequency	Power	Speed	Pressure	Airflow	Noise	Blower
	A	B	C								
LWCA-5090UN-01	163	110	100	120	60	20.7	3200	44	60	40	Single
LWCA-5090SN-02				220	50	17	2700	37	50	40	Single
LWCA-50150UN-01	223	170	160	120	60	21.6	3100	41	106	40	Single
LWCA-50150SN-02				220	50	17.3	2500	37	90	40	Single
LWCA-50190UN-01	263	210	200	120	60	23.3	3000	40	150	42	Single
LWCA-50190SN-02				220	50	17.6	2500	38	125	42	Single
LWCA-50250UN-01	318	260	250	120	60	19.7	3000	42	190	44	Single
LWCA-50250SN-02				220	50	19.8	3600	39	153	42	Single
LWCA-50290UN-01	368	310	300	120	60	20	2800	45	199	45	Single
LWCA-50290SN-02				220	50	19.6	2500	40	187	43	Single
LWCA-50350UN-01	428	370	360	120	60	20.9	2700	49	225	48	Single
LWCA-50350SN-02				220	50	20	2500	44	216	48	Single
LWCA-50420UN-01	488	430	420	120	60	22.1	2500	54	252	52	Single
LWCA-50420SN-02				220	50	21.1	2300	49	206	49	Single