

LWCA-60 Series

Product Characteristic

- Motor Type :

AC Shaded Pole Motor
- Housing Material :

Galvanized Sheet Steel
- Blade Material :

Aluminum Alloy
- Insulation Class :


B/F/H
- Bearing Type:

Ball bearing
- Operation Temperature :

- 25 C ~ +60 C



Product Drawing

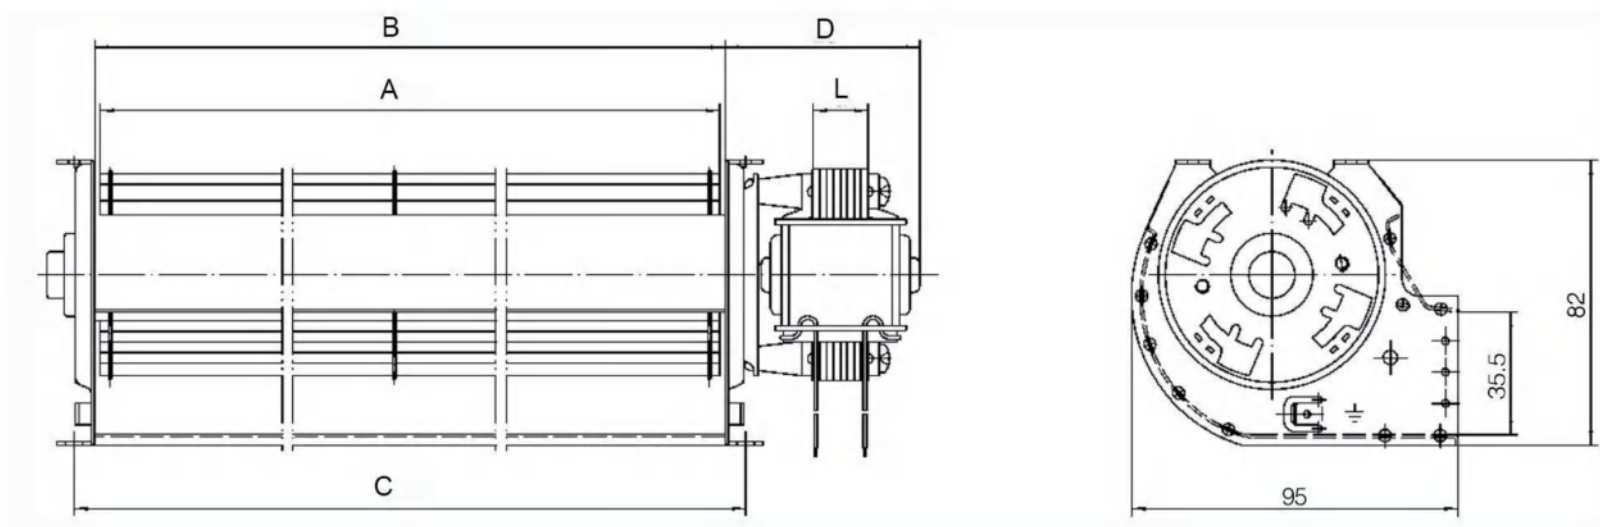

Technical Specifications

Model	Dimension(mm)					Voltage	Frequency	Power	Speed	Pressure	Airflow	Noise	Blower
	A	B	C	D	L								
LWCA-60120SN-01	120	123	135	56	16	220	50	20	2600	7.2/72	110	51	Single
LWCA-60180SN-01	180	183	195	56	16	220	50	21	1750	6.1/61	120	46	Single
LWCA-60240SN-01	240	243	255	60	20	220	50	40	2500	7.0/70	220	48	Single
LWCA-60300SN-01	300	303	315	60	20	220	50	51	2700	7.5/75	290	55	Single
LWCA-60360SN-01	360	363	375	68	30	220	50	35	1450	5.3/53	185	41	Single
LWCA-60420SN-01	420	423	435	68	30	220	50	55	2300	7.1/71	340	50	Single
LWCA-60480SN-01	480	483	495	80	40	220	50	56	2100	6.8/68	355	49	Single

LWCA-60 Series

Product Characteristic

- Motor Type :

AC Shaded Pole Motor
- Housing Material :

Galvanized Sheet Steel
- Blade Material :

Aluminum Alloy
- Insulation Class :


B/F/H
- Bearing Type:

Ball bearing
- Operation Temperature :

- 25 C ~ +60 C



Product Drawing

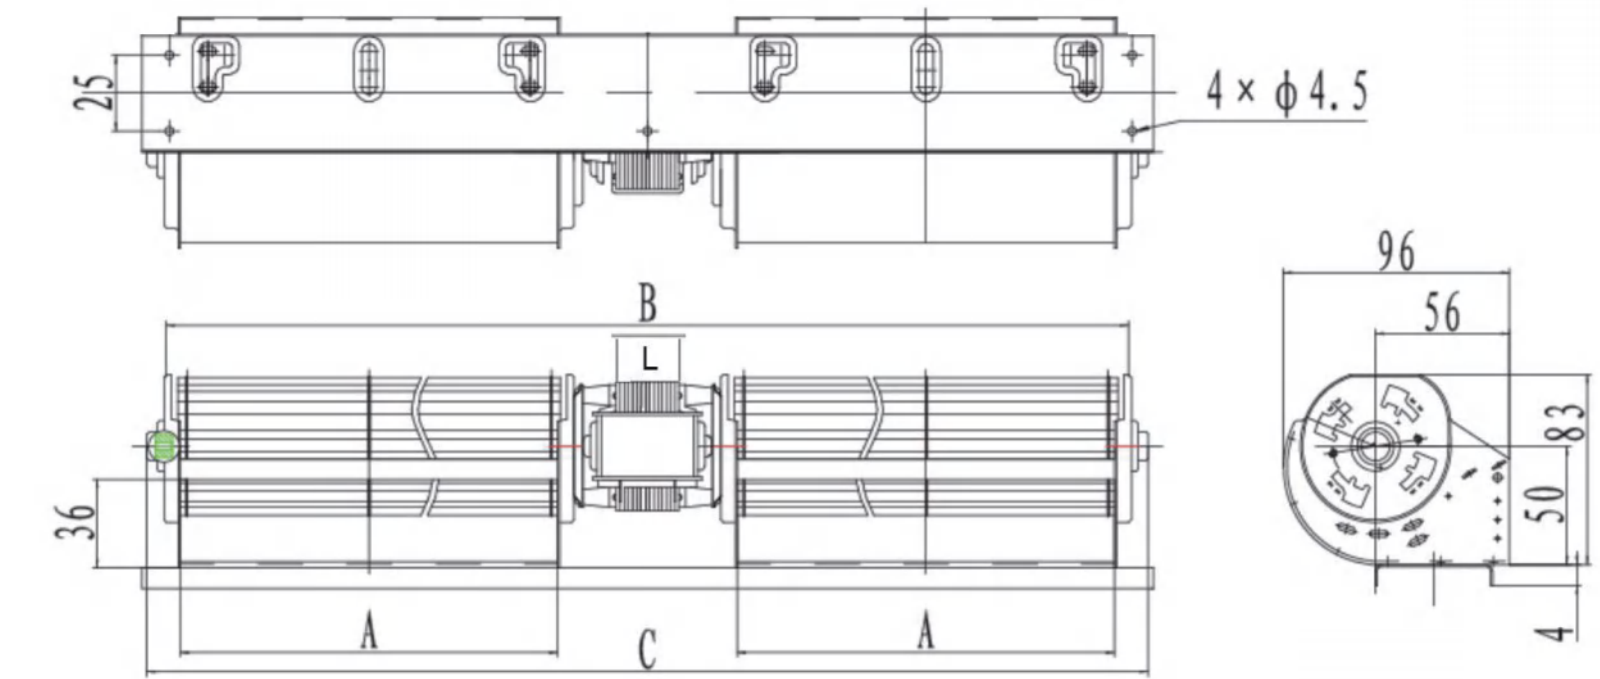

Technical Specifications

Model	Dimension(mm)				Voltage	Frequency	Power	Speed	Pressure	Airflow	Noise	Blower
	A	B	C	L								
LWCA-60120SN-02	120	355	350	22	220	50	30	2300	5.2/52	140	42	Double
LWCA-60180SN-02	180	485	590	22	220	50	33	2200	5.4/54	260	43	Double
LWCA-60240SN-02	240	585	590	25	220	50	47	2000	5.7/57	300	45	Double
LWCA-60300SN-02	300	795	800	25	220	50	39	1650	6.5/65	420	47	Double