


LWCA-65 Series

Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃



Product Drawing

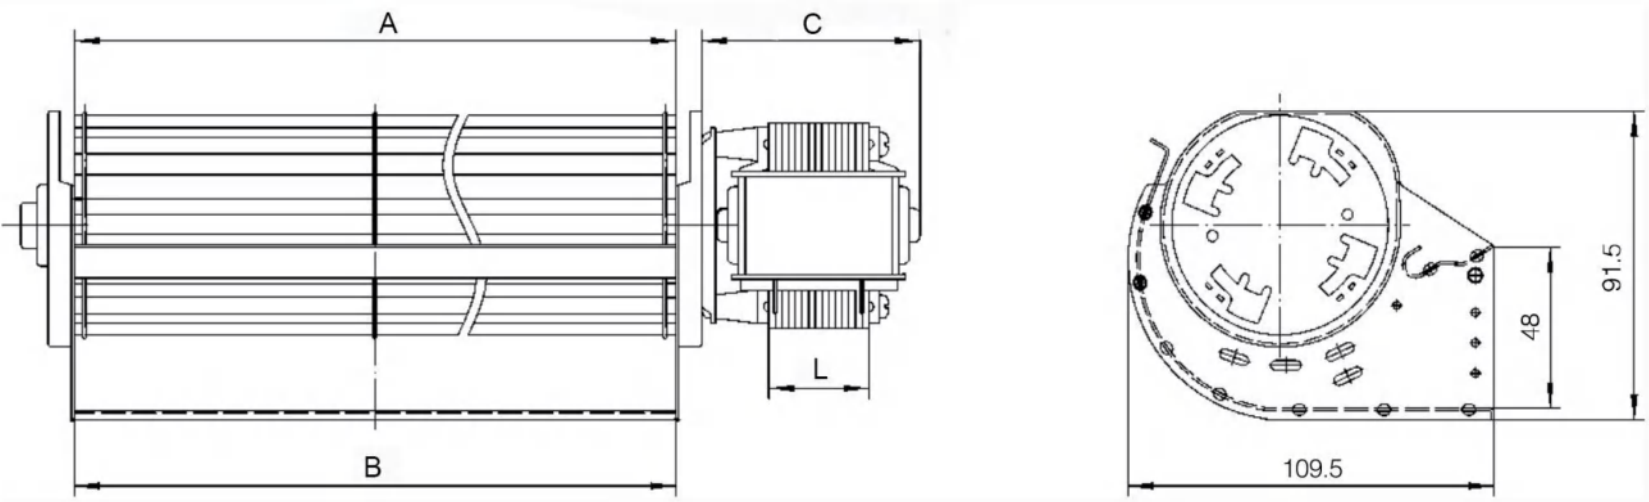

Technical Specifications

Model	Dimension(mm)				Voltage	Frequency	Power	Speed	Pressure	Airflow	Noise	Blower
	A	B	C	L								
LWCA-65120SN-01	120	120	56	16	220	50	24	2200	8.1/8.1	210	46	Single
LWCA-65180SN-01	180	180	56	16	220	50	43	2250	8.2/8.2	320	50	Single
LWCA-65240SN-01	240	240	60	20	220	50	50	2180	8.1/8.1	410	51	Single
LWCA-65300SN-01	300	300	60	20	220	50	56	2000	7.3/73	465	51	Single
LWCA-65360SN-01	360	360	68	30	220	50	60	1800	6.7/67	500	49	Single
LWCA-65420SN-01	420	420	68	30	220	50	60	1600	5.5/55	505	50	Single
LWCA-65480SN-01	480	480	80	40	220	50	65	1500	5.5/55	540	51	Single


LWCA-65 Series

Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃



Product Drawing

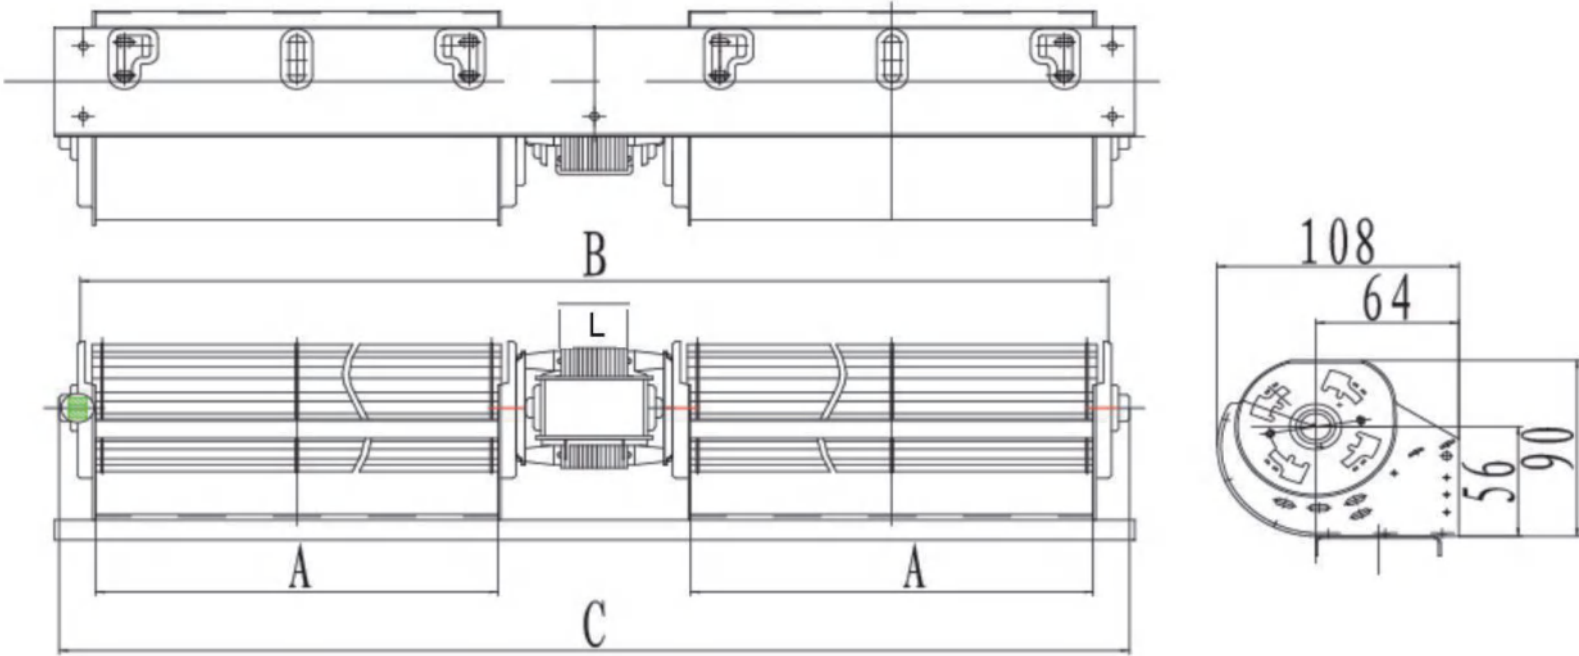

Technical Specifications

Model	Dimension(mm)				Voltage	Frequency	Power	Speed	Pressure	Airflow	Noise	Blower
	A	B	C	L								
LWCA-65120SN-02	120	355	360	25	220	50	54	2300	8.7/87	275	38	Double
LWCA-65180SN-02	180	485	590	25	220	50	51	2200	6.8/68	300	39	Double
LWCA-65240SN-02	240	585	590	28	220	50	55	2000	6.7/67	330	40	Double
LWCA-65300SN-02	300	795	800	30	220	50	72	1650	6.4/64	430	43	Double