


LWAA-185 Serise




Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 7
- Mode of Operation: S1
- Type of Protection: IP44
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C

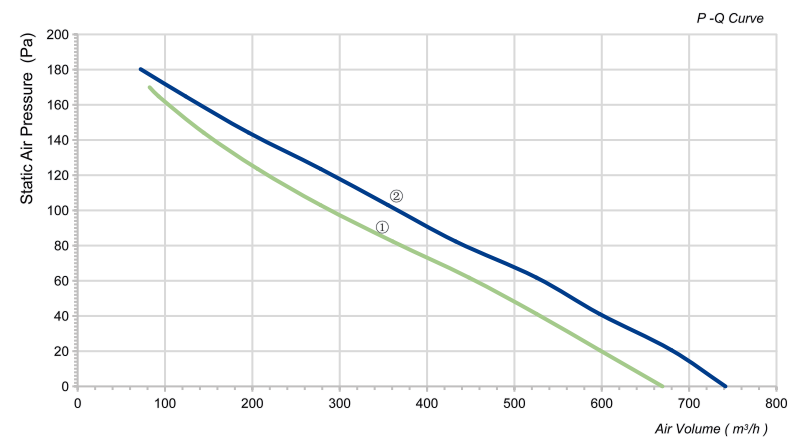


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA2E185S-7MNV-01	220/230	50	0.25	55	2400	670	1.5	51	①
LWAA2E185S-7MNV-02	220/230	60	0.28	75	2700	742	1.5	52	②
LWAA2D185S-7MNV-03	380/400	50	0.15	55	2400	670	/	51	①
LWAA2D185S-7MNV-04	380/400	60	0.18	75	2700	742	/	52	②

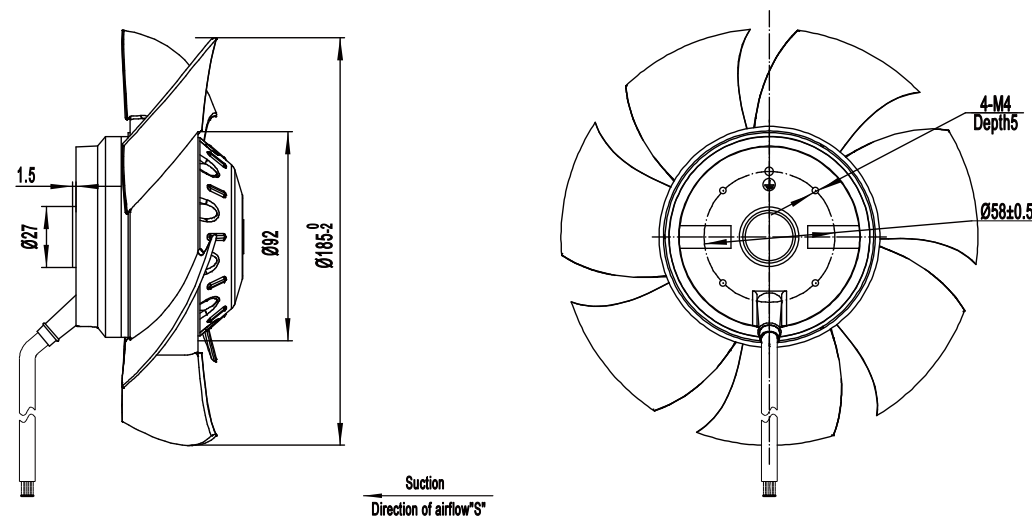

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWAA-200 Serise

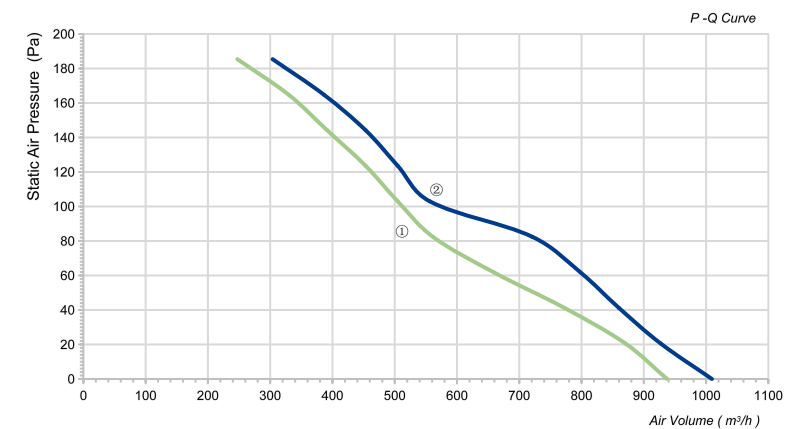


Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 7
- Mode of Operation: S1
- Type of Protection: IP44
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA2D200S-7MNV-01	380/400	50	0.21	65	2300	906	/	53	①
LWAA2D200S-7MNV-02	380/400	60	0.24	80	2600	1009	/	55	②

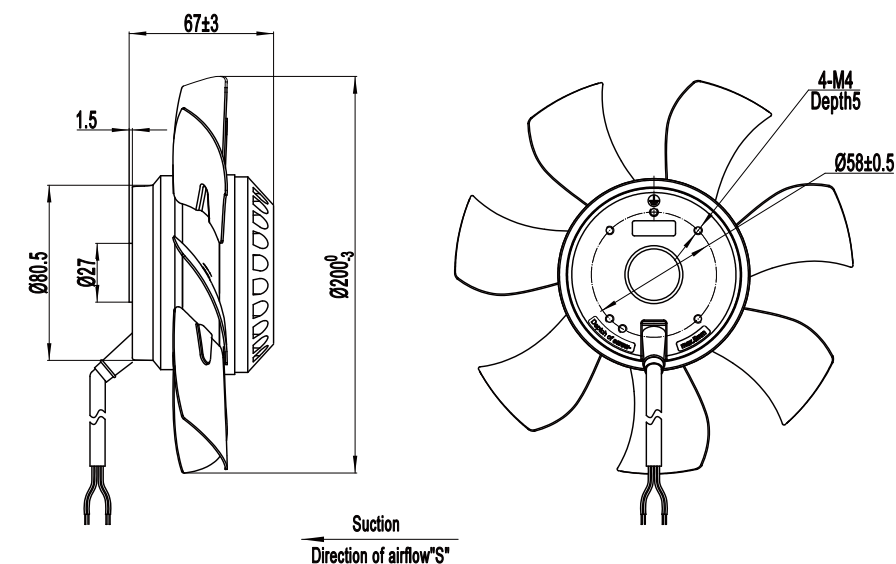

zakaz@ventilatorry.ru +7 (495) 133-95-09