

LWAA-350 Serise

Product Characteristic


- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30~+60 C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E350S-5MEB-01	220/230	50	0.6	135	1380	2781	3	58	①
LWAA4E350S-5MEB-02	220/230	60	0.83	190	1550	3090	3	60	②
LWAA4D350S-5MEB-03	380/400	50	0.3	135	1360	2781	/	58	①
LWAA4D350S-5MEB-04	380/400	60	0.34	170	1500	3090	/	60	②
LWAA6E350S-5MEB-05	220/230	50	0.4	75	950	1607	3	53	③
LWAA6E350S-5MEB-06	220/230	60	0.37	83	1100	1854	3	54	④
LWAA6D350S-5MEB-07	380/400	50	0.29	70	920	1607	/	53	③
LWAA6D350S-5MEB-08	380/400	60	0.2	80	1050	1854	/	54	④

Product Drawing (mm)

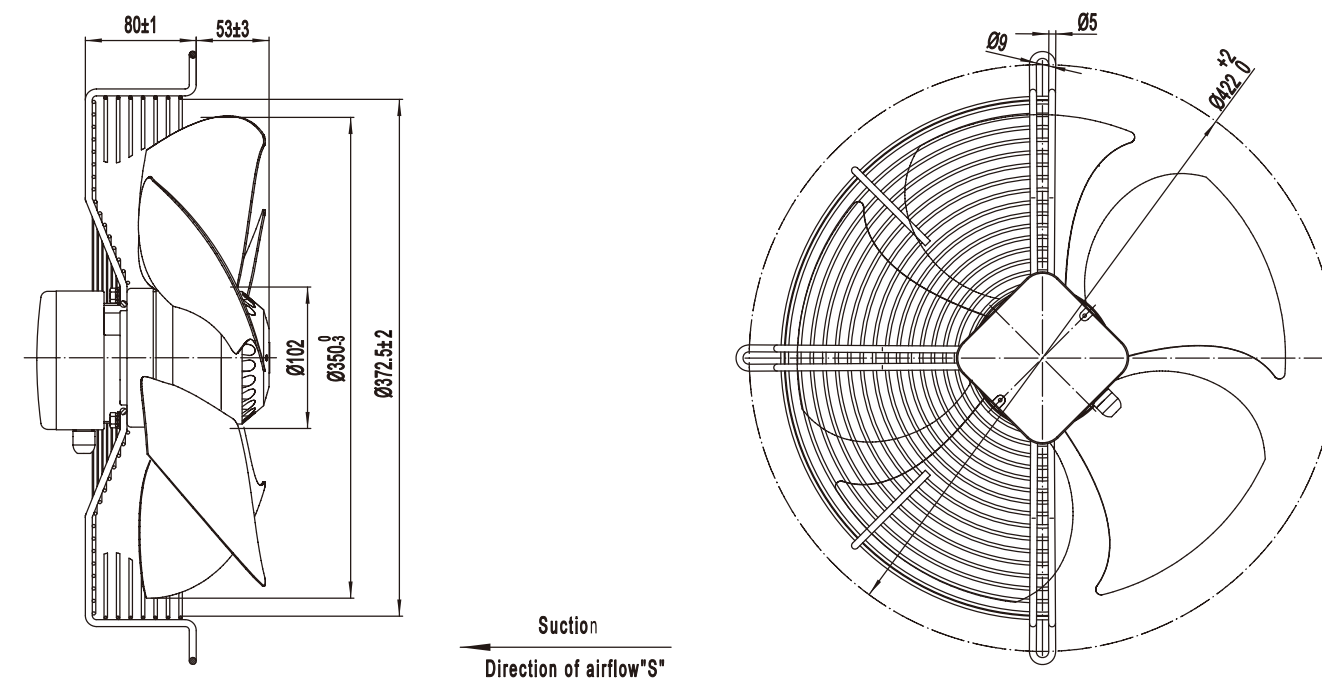

Flow Rate Curve

