

LWAA-500 Serise

Product Characteristic



- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30~+60 C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E500S-5MEB-01	220/230	50	1.9	420	1320	6695	10	69	①
LWAA4E500S-5MEB-02	220/230	60	2.3	500	1450	7004	10	70	②
LWAA4D500S-5MEB-03	380/400	50	0.9	420	1350	6695	/	69	①
LWAA4D500S-5MEB-04	380/400	60	1	500	1500	7004	/	70	②
LWAA6E500S-5MEB-05	220/230	50	1.1	220	900	4450	6	65	③
LWAA6E500S-5MEB-06	220/230	60	1.35	250	1020	4944	6	66	④
LWAA6D500S-5MEB-07	380/400	50	0.6	220	900	4450	/	65	③
LWAA6D500S-5MEB-08	380/400	60	0.65	250	1100	4944	/	66	④

Product Drawing (mm)

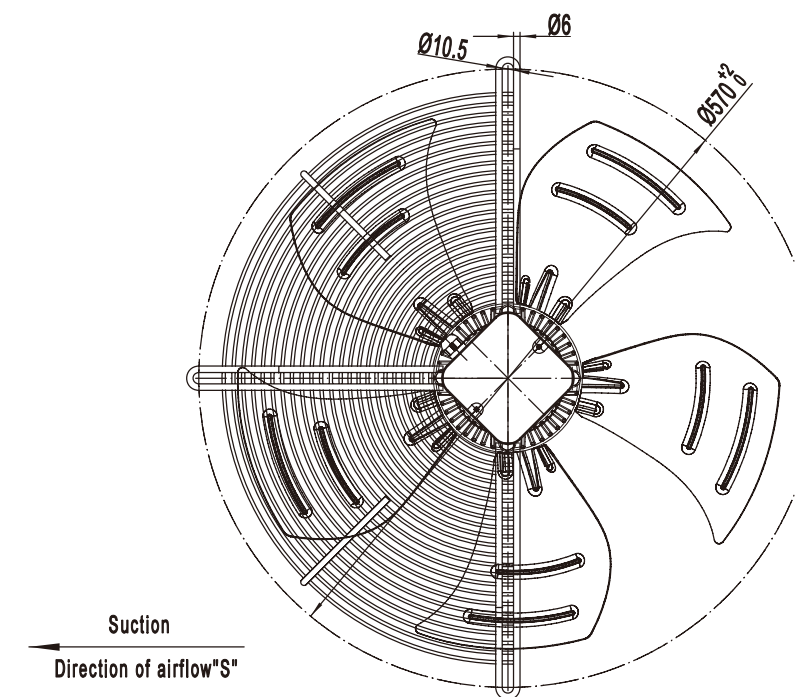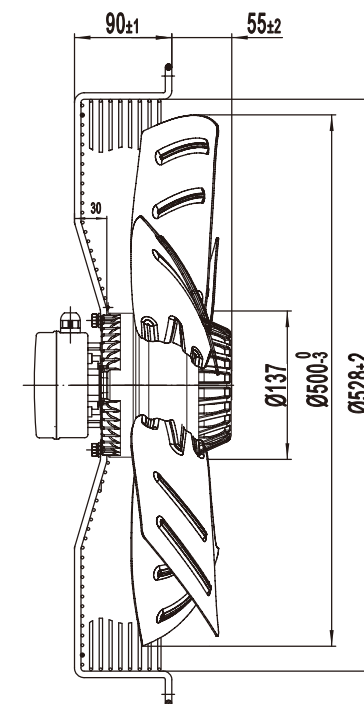

Flow Rate Curve

