

LWAD17238 Series



Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch--H2O	Pa	dBA	g	
LWAD17238MX-01	24	1.5	3000	299.6	8.48	19	0.75	186	57.4	533g	①
LWAD17238MX-02	24	0.8	2500	249.6	7.07	13.2	0.52	129	53.4	533g	②
LWAD17238MX-03	24	0.5	2000	199.7	5.66	8.4	0.33	83	48.6	533g	③
LWAD17238HX-01	48	0.8	3000	299.6	8.48	19	0.75	186	57.4	533g	①
LWAD17238HX-02	48	0.4	2500	249.6	7.07	13.2	0.52	129	53.4	533g	②
LWAD17238HX-03	48	0.3	2000	199.7	5.66	8.4	0.33	83	48.6	533g	③

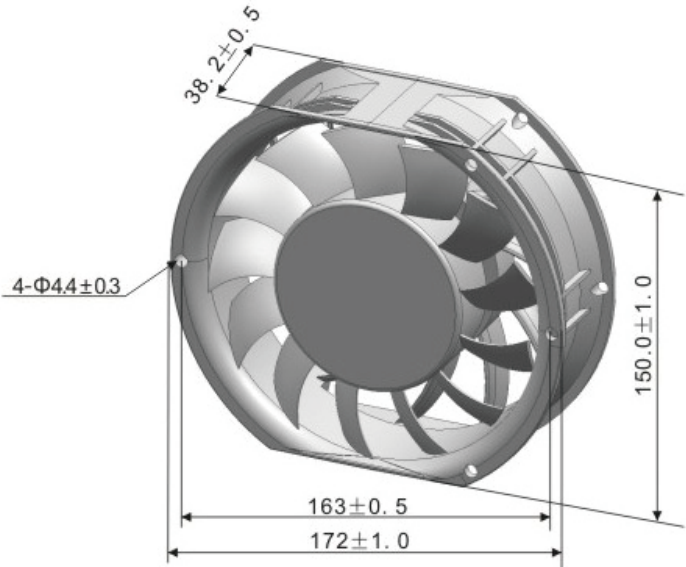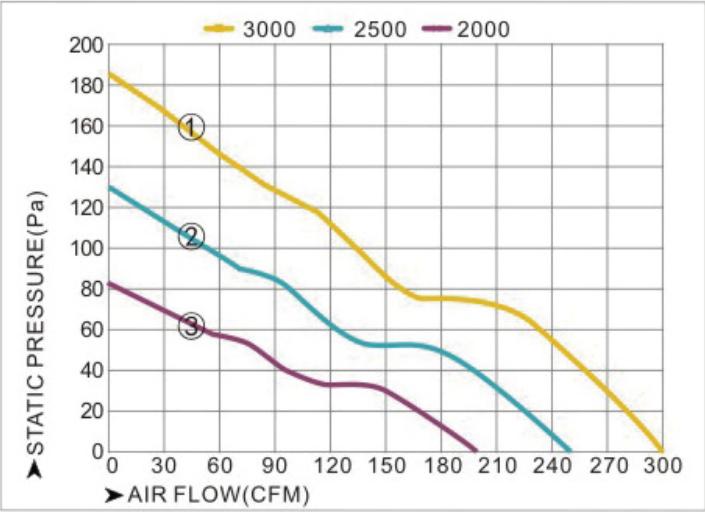

LWAD17251 Series

Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch--H2O	Pa	dBA	g	
LWAD17251LX-01	12	5	4500	329.9	9.34	34.7	1.37	340	63.7	660g	①
LWAD17251LX-02	12	3.5	4000	293.3	8.3	27.4	1.08	269	61.1	660g	②
LWAD17251LH-03	12	3	3500	256.6	7.27	21	0.83	206	58.2	660g	③
LWAD17251LM-04	12	2.5	3000	220	6.23	15.4	0.61	151	54.9	660g	④
LWAD17251LL-05	12	2	2500	183.3	5.19	10.7	0.42	105	50.9	660g	⑤
LWAD17251MX-01	24	4.5	4500	329.9	9.34	34.7	1.37	340	63.7	660g	①
LWAD17251MX-02	24	3.5	4000	293.3	8.3	27.4	1.08	269	61.1	660g	②
LWAD17251MH-03	24	2.5	3500	256.6	7.27	21	0.83	206	58.2	660g	③
LWAD17251MM-04	24	2	3000	220	6.23	15.4	0.61	151	54.9	660g	④
LWAD17251ML-05	24	1.5	2500	183.3	5.19	10.7	0.42	105	50.9	660g	⑤
LWAD17251HX-01	48	2	4500	329.9	9.34	34.7	1.37	340	63.7	660g	①
LWAD17251HX-02	48	1.6	4000	293.3	8.3	27.4	1.08	269	61.1	660g	②
LWAD17251HH-03	48	1.2	3500	256.6	7.27	21	0.83	206	58.2	660g	③
LWAD17251HM-04	48	1	3000	220	6.23	15.4	0.61	151	54.9	660g	④
LWAD17251HL-05	48	0.6	2500	183.3	5.19	10.7	0.42	105	50.9	660g	⑤

