


LWBA-180 Series




Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 °C ~ +65 °C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

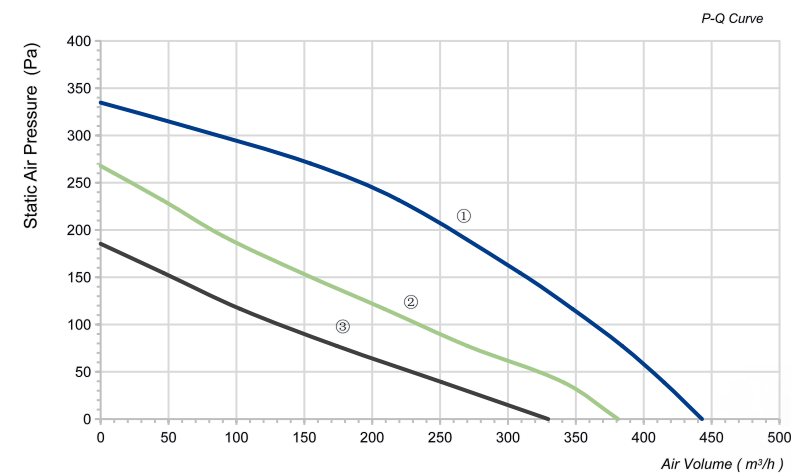


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E180-092NS-03	230	50	52	0.23	2560	443	335	63	1.5uF	①
			42	0.19	2200	381	268	59	1.5uF	②
			40	0.18	1900	330	185	55	1.5uF	③

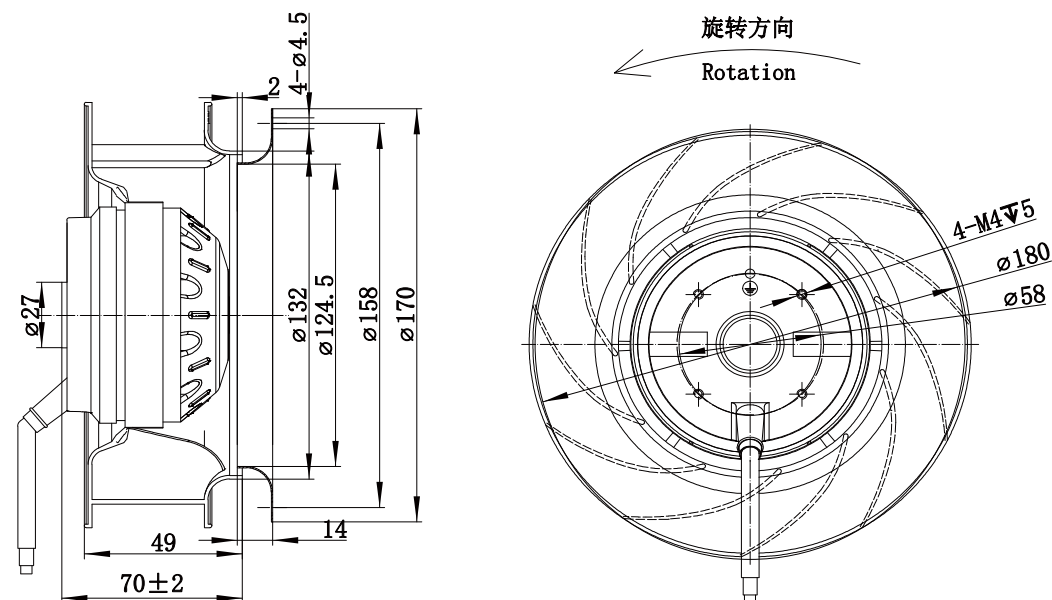

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBA-190 Series

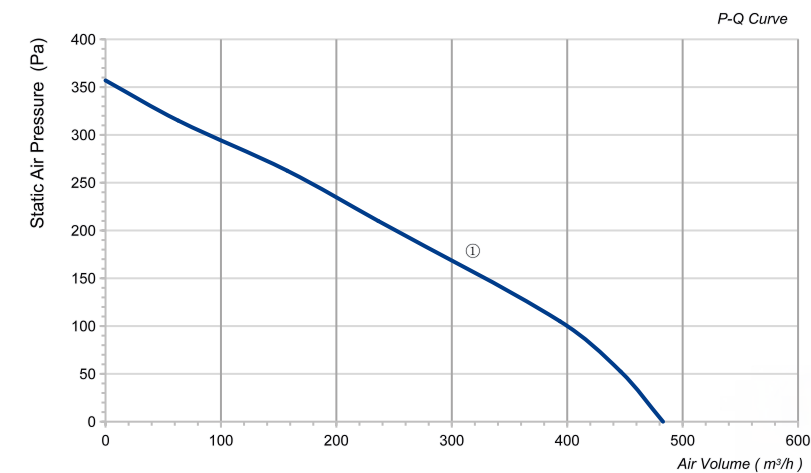


Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40 °C ~ +65 °C
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E190-072NS-01	230	50	56	0.25	2640	483	357	64.9	2uF	①

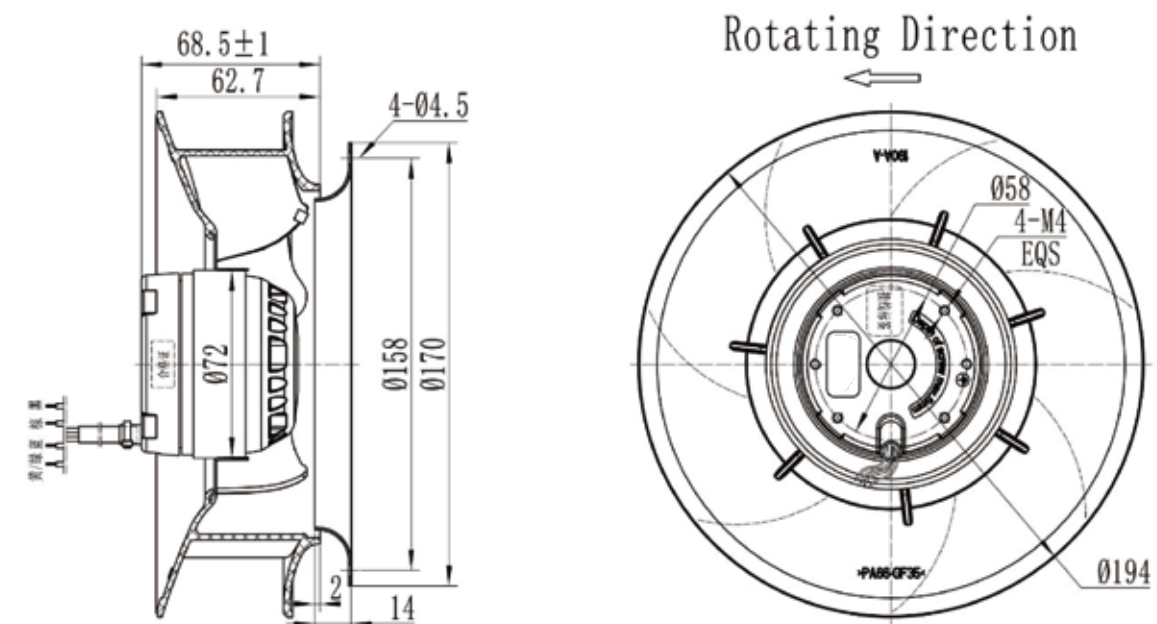

zakaz@ventilatorry.ru +7 (495) 133-95-09