


LWCA-90 Series


Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃

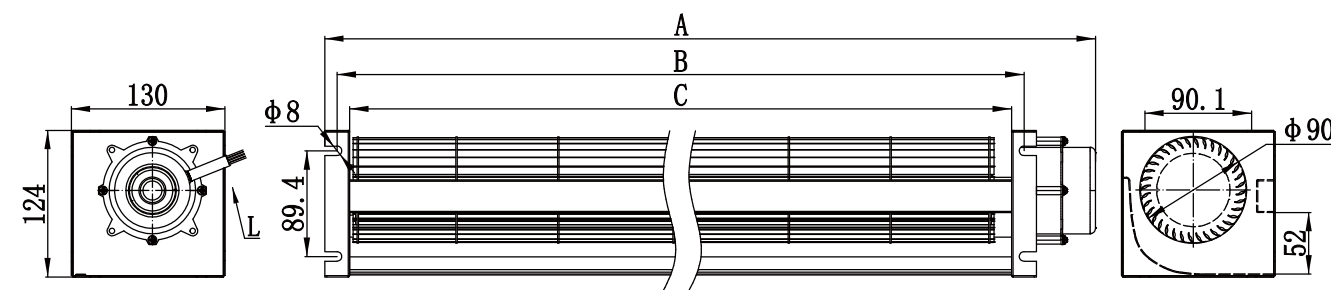

Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Frequency (Hz)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCA-90360SN-06	462	381	360	230	50	33	1350	61	550	53	Single
LWCA-90520SN-06	627	546	520	230	50	55	1350	77	770	54	Single
LWCA-90680SN-06	782	701	680	230	50	72	1350	97	1000	55	Single
LWCA-90800SN-06	902	821	800	230	50	83	1350	120	1150	58	Single
LWCA-90920SN-06	1032	951	930	230	50	93	1350	140	1300	59	Single

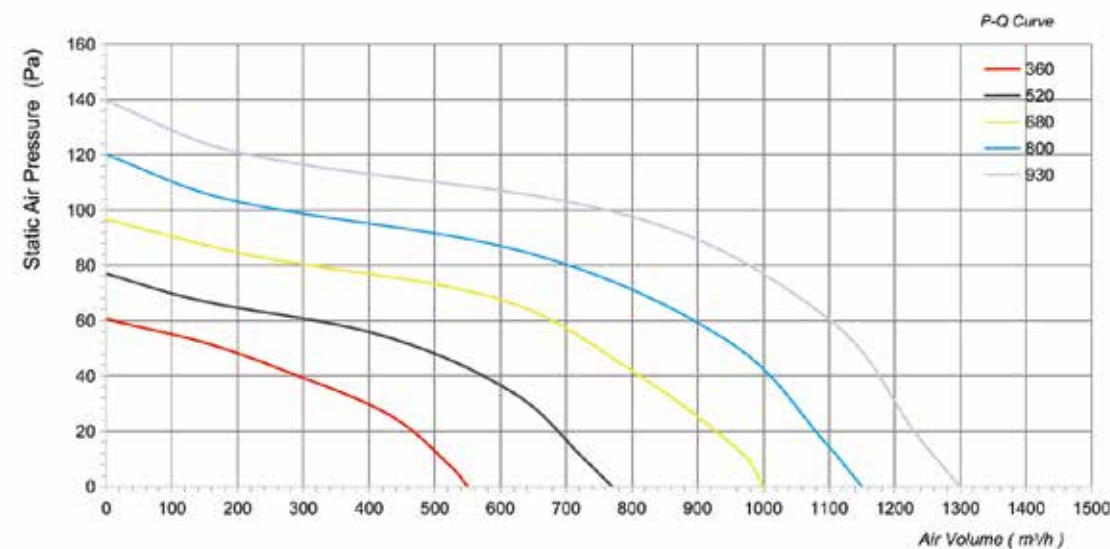


zakaz@ventilatorry.ru +7 (495) 133-95-09

LWCA-100 Series


Product Characteristic

- Motor Type : AC Shaded Pole Motor
- Housing Material : Galvanized Sheet Steel
- Blade Material : Aluminum Alloy
- Insulation Class : B/F/H
- Bearing Type: Ball bearing
- Operation Temperature : - 25 ℃ ~ +60 ℃

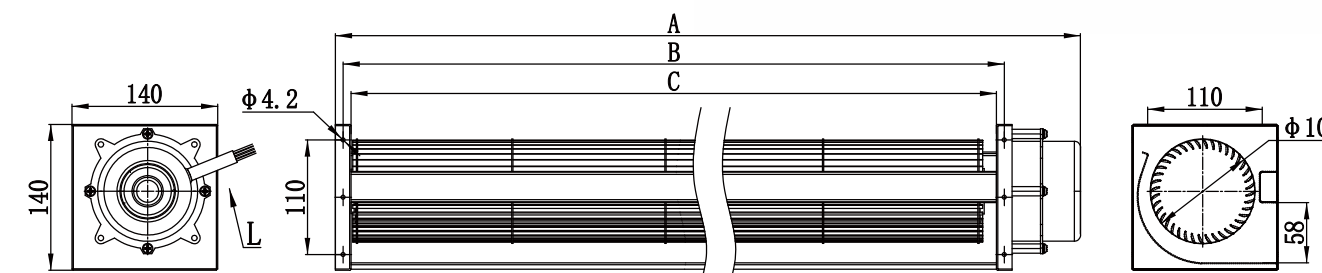

Technical Specifications

Model	A (mm)	B (mm)	C (mm)	Voltage (V)	Frequency (Hz)	Power (W)	Speed (RPM)	Pressure (Pa)	Air Flow (m³/h)	Noise [dB(A)]	Blower
LWCA-100380SN-06	476	395	380	230	50	60	1400	95	700	55	Single
LWCA-100520SN-06	616	535	520	230	50	75	1400	128	950	58	Single
LWCA-100620SN-06	716	635	620	230	50	90	1400	151	1100	59	Single
LWCA-100720SN-06	816	735	720	230	50	100	1400	175	1300	60	Single
LWCA-100820SN-06	916	835	820	230	50	110	1400	203	1500	61	Single

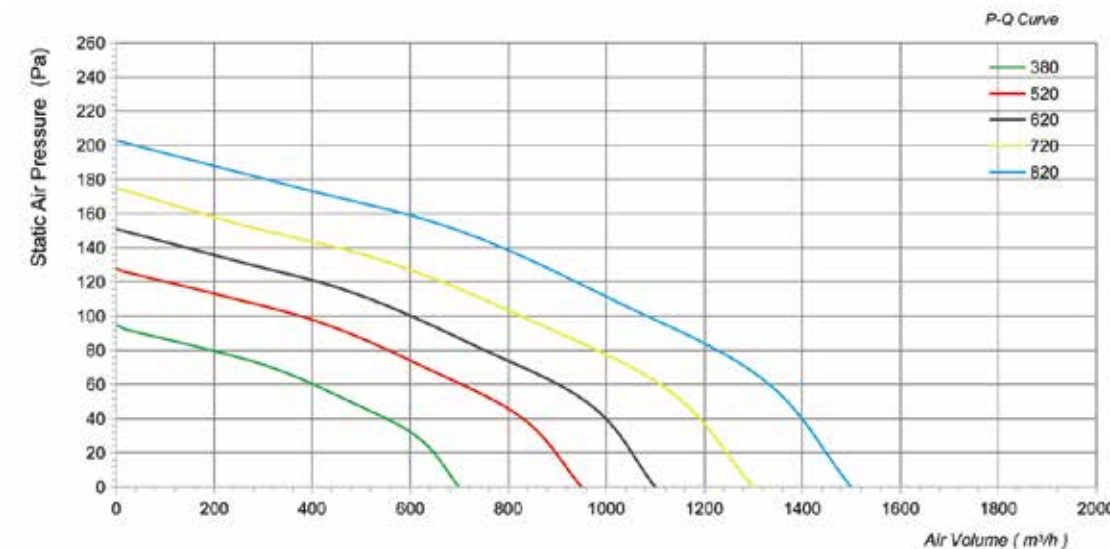

zakaz@ventilatorry.ru +7 (495) 133-95-09