

Square Type Axial Fan with Shutter





Technical Parameters

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (m³/h)	Air pressure (Pa)	Noise (dBA)	Capacitor (uF)
LWEA2D200TM-077	380	50	0.25	80	2700	1080	122	57	-
LWEA2E200SM-078	220	50	0.3	70	2650	1050	120	56	2.5
LWEA4D200TM-079	380	50	0.2	50	1400	500	60	50	-
LWEA4E200SM-080	220	50	0.2	40	1400	510	55	50	1.5
LWEA2D250TM-081	380	50	0.25	105	2650	1850	192	65	-
LWEA2E250SM-082	220	50	0.53	115	2550	1800	190	65	4
LWEA4D250TM-083	380	50	0.23	55	1450	1250	60	55	-
LWEA4E250SM-084	220	50	0.3	60	1440	1230	60	55	2.5
LWEA2D300TM-085	380	50	0.28	140	2480	3250	205	66	-
LWEA2E300SM-086	220	50	0.8	180	2550	3300	210	66	6
LWEA4D300TM-087	380	50	0.25	70	1400	1950	70	60	-
LWEA4E300SM-088	220	50	0.35	75	1400	1950	70	60	3
LWEA2D350TM-089	380	50	0.72	400	2400	4850	225	73	-
LWEA2E350SM-090	220	50	1.8	400	2350	4750	223	72	10
LWEA4D350TM-091	380	50	0.45	130	1400	3270	93	64	-
LWEA4E350SM-092	220	50	0.55	125	1400	3270	93	64	4
LWEA2D400TM-093	380	50	1.05	580	2350	6480	240	74	-
LWEA2E400SM-094	220	50	2.4	510	2280	6100	240	80	12
LWEA4D400TM-095	380	50	0.6	180	1400	4800	125	68	-
LWEA4E400SM-096	220	50	0.9	190	1400	4800	125	68	6
LWEA4D450TM-097	380	50	0.53	210	1390	5410	155	70	-
LWEA4E450SM-098	220	50	1.25	280	1380	5380	150	69	10
LWEA6D450TM-099	380	50	0.42	155	950	4650	100	60	-
LWEA6E450SM-100	220	50	0.85	165	950	4650	100	60	8

LWEA4D500TM-101	380	50	0.62	280	1390	8850	192	72	-
LWEA4E500SM-102	220	50	1.75	370	1390	8850	190	72	12
LWEA6D500TM-103	380	50	0.9	210	950	5800	125	65	-
LWEA6E500SM-104	220	50	0.9	230	950	5800	125	65	8
LWEA4D550TM-105	380	50	0.9	450	1350	10800	215	74	-
LWEA4E550SM-106	220	50	2.5	500	1350	10800	215	74	12
LWEA6D550TM-107	380	50	1	210	950	6500	135	68	-
LWEA6E550SM-108	220	50	1.1	300	950	6500	135	68	8
LWEA4D600TM-109	380	50	1.55	680	1380	13000	230	75	-
LWEA4E600SM-110	220	50	3.25	750	1380	13000	230	75	15
LWEA6D600TM-111	380	50	1.2	360	930	9600	150	70	-

Outline Dimension Drawing

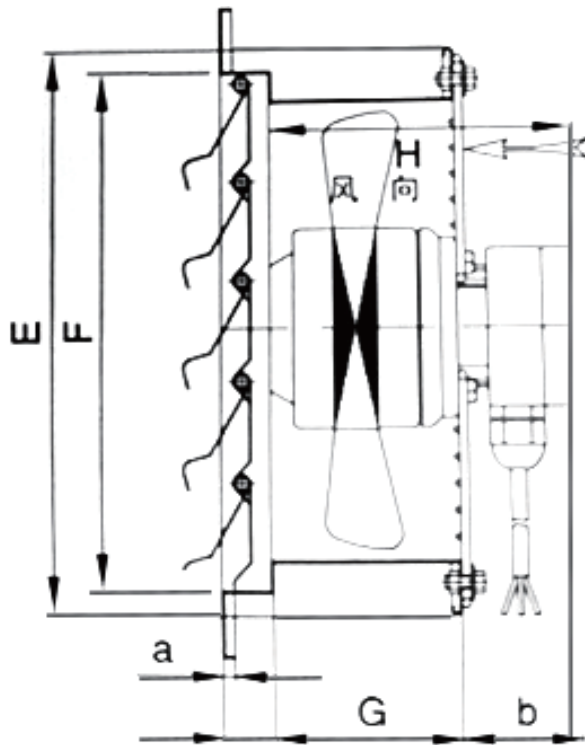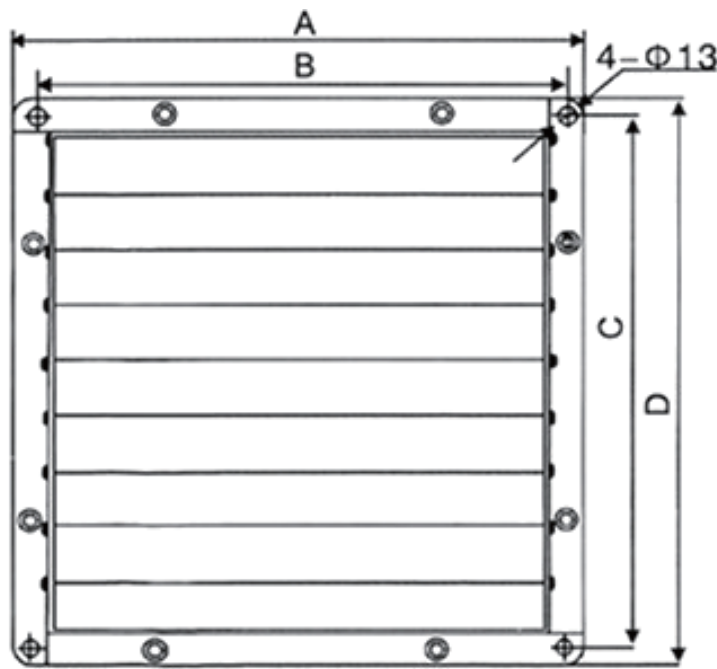

Dimension Table

Unit:mm								
Model	AxD	BxC	E	F	G	H	a	b
LWEA-200	270X270	240X240	/	210	120	148	12	53
LWEA-250	320X320	290X290	270	260	120	148	12	53
LWEA-300	370X370	340X340	320	310	132	158	12	53
LWEA-350	420X420	390X390	375	365	138	168	12	41
LWEA-400	470X470	440X440	425	415	148	181	12	57
LWEA-500	570X570	540X540	525	515	175	183	12	57
LWEA-600	670X670	640X640	625	615	209	218	12	57