
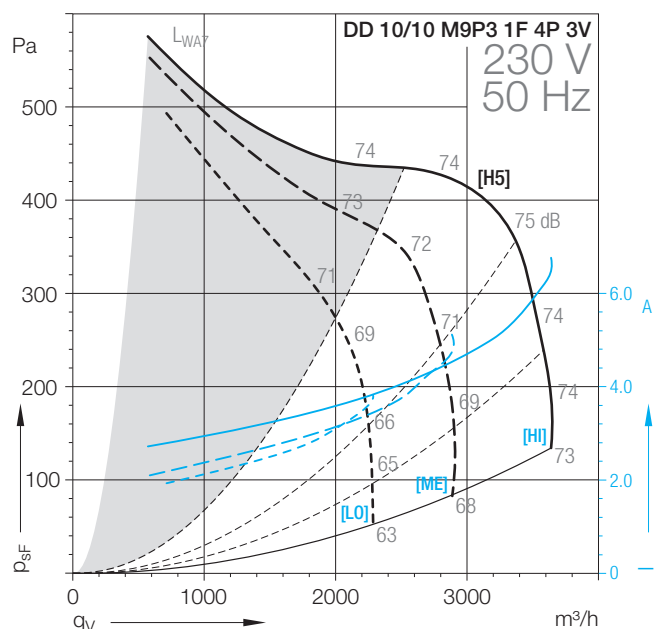
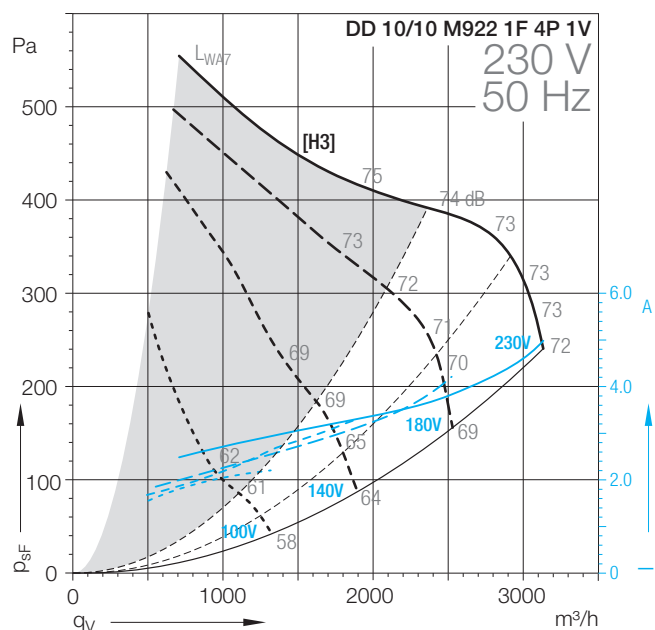


DD-10/10

Technical Data

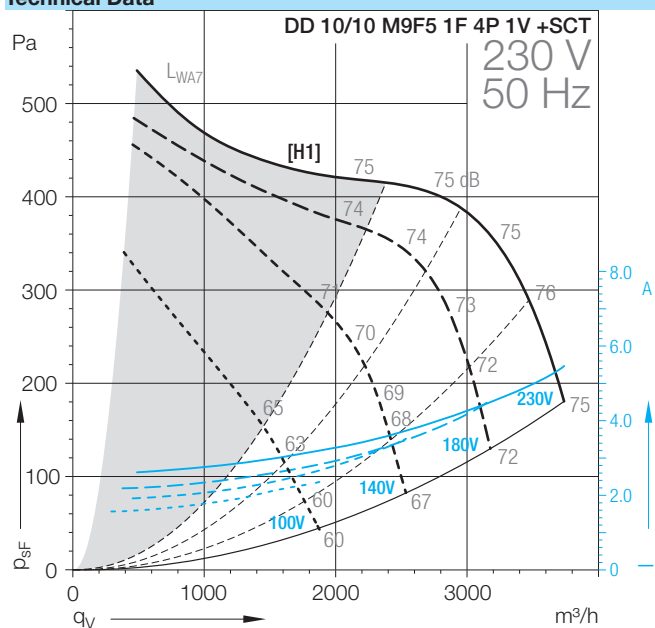

Оформить
Заказ

DD-10/10**Technical Data**

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DD 10/10										
M9F5 1F 4P 1V +SCT	(2)	[H1]	550	4	1~		50	1238	5.1	1200
M922 1F 4P 1V	(2)	[H3]	373	4	1~		50	1141	4.8	1380
M9P3 1F 4P 3V	*	[H5]	550	4	1~		50	1494	6.3	1370

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DD 10/10										
M9F5 1F 4P 1V +SCT	16	500	IP44	F	EXT	40	15	1.2	B	6M09CU
M922 1F 4P 1V	12.5	450	IP20	F	INT	40	15	1.2	B	6M0627
M9P3 1F 4P 3V	16	450	IP20	F	INT	40	15	1.2	B	6M061U







(1) = Speed controllable via Transformer

(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter





* = No speed control available

[H] High speed, [ME] Medium speed, [LO] Low speed

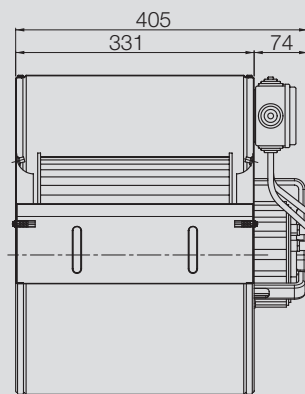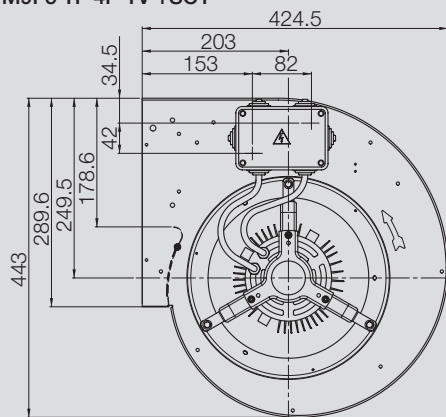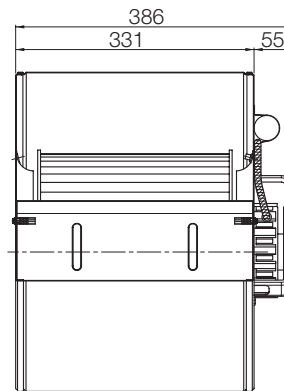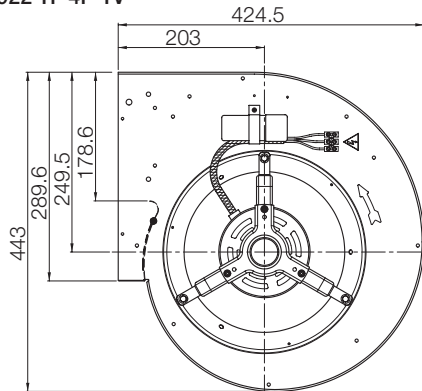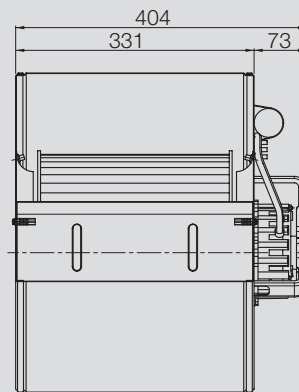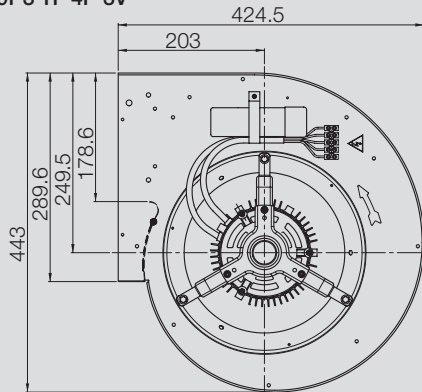Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.**Dimensions** in mm, subject to change.**DD 10/10 M9F5 1F 4P 1V +SCT****DD 10/10 M922 1F 4P 1V****DD 10/10 M9P3 1F 4P 3V****Оформить
Заказ**

DD-10/10

Technical Data

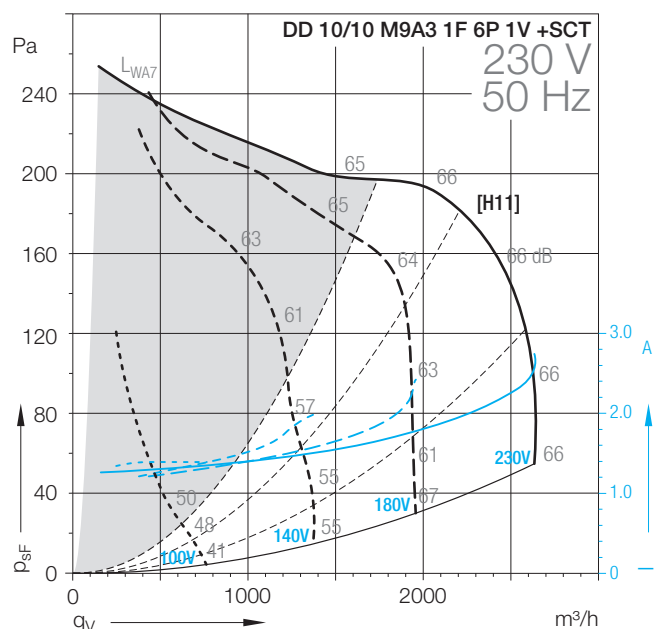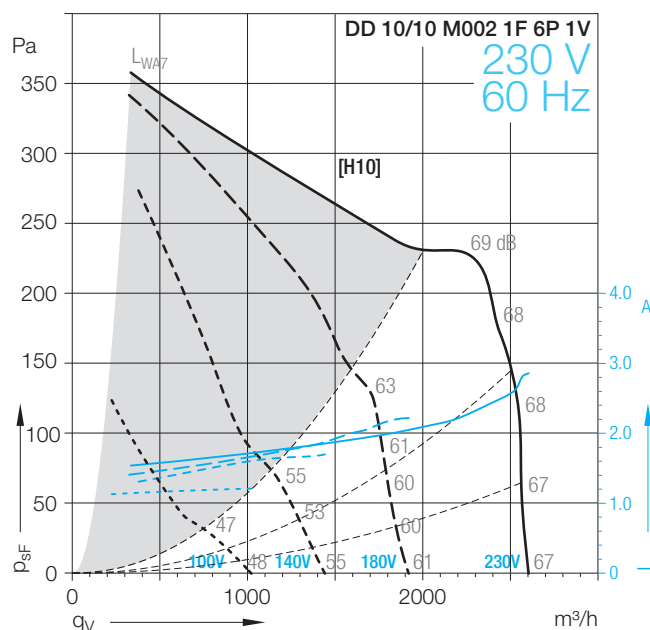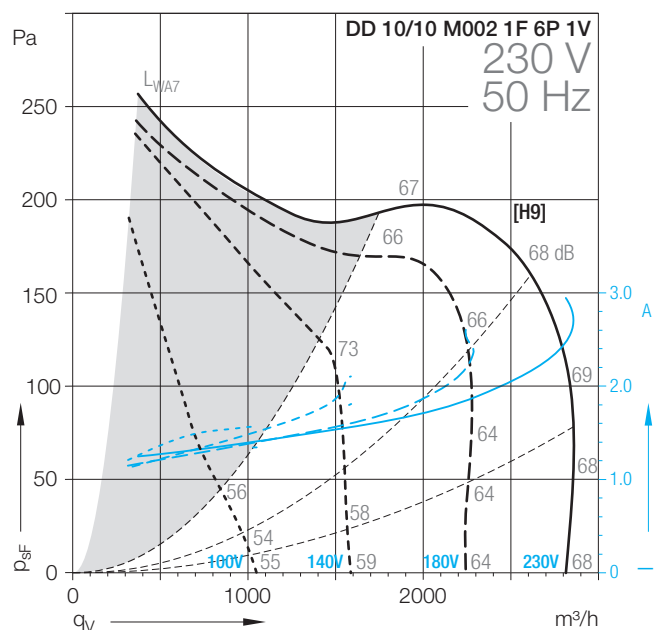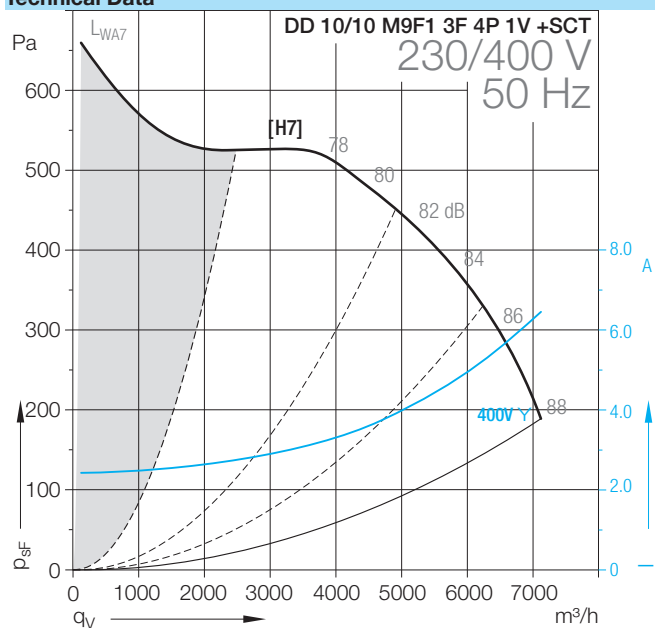

Оформить
Заказ

DD-10/10**Technical Data**

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DD 10/10										
M9F1 3F 4P 1V +SCT	(3)	[H7]	1500	4	3~	Δ/Y	50/60	3616	5.6	1420
M002 1F 6P 1V	(1)	[H9/H10]	245	6	1~		50/60	643	2.8	850
M9A3 1F 6P 1V +SCT	(2)	[H11]	245	6	1~		50	551	2.6	830

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DD 10/10										
M9F1 3F 4P 1V +SCT			IP55	F	NO	40	15	1.2	B	6109A9
M002 1F 6P 1V	8	450	IP20	F	INT	40	15	1.2	B	6M0314
M9A3 1F 6P 1V +SCT	8	450	IP44	B	INT	40	15	1.2	B	6M0687




(1) = Speed controllable via Transformer

(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter





* = No speed control available

[H] High speed, [ME] Medium speed, [LO] Low speed

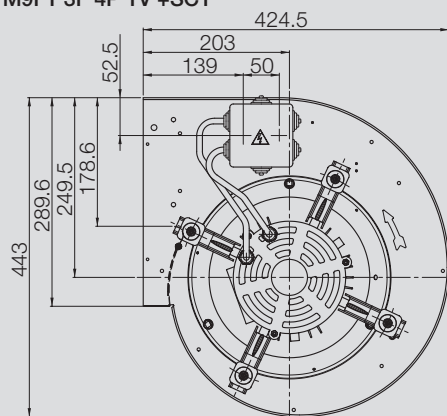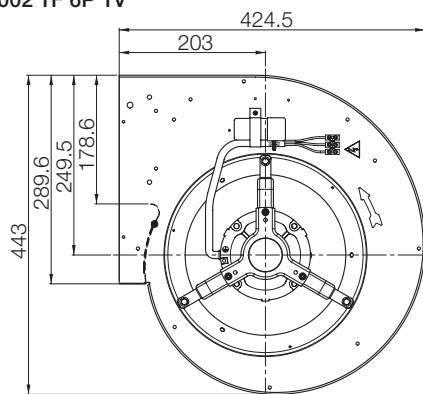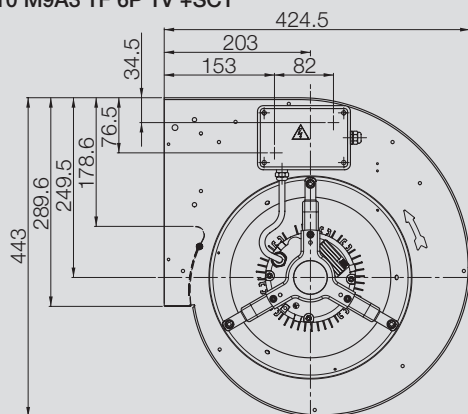Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.**Dimensions** in mm, subject to change.**DD 10/10 M9F1 3F 4P 1V +SCT****DD 10/10 M002 1F 6P 1V****DD 10/10 M9A3 1F 6P 1V +SCT****Оформить
Заказ**Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09

DD-10/10

Technical Data

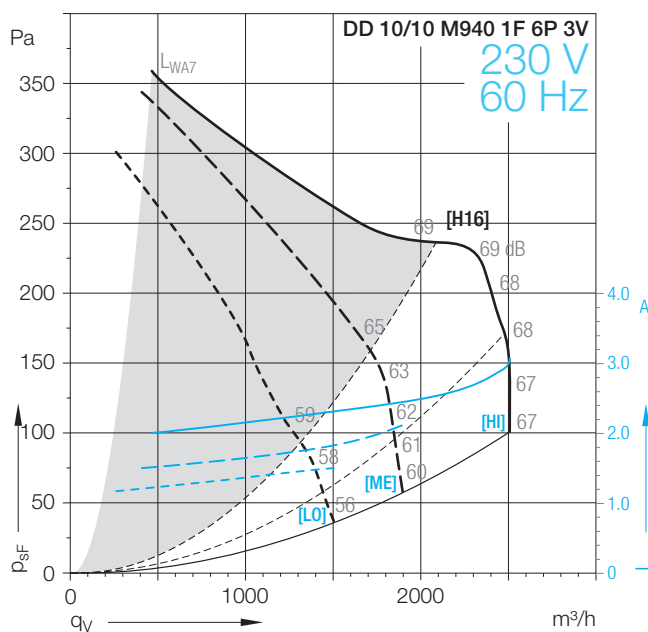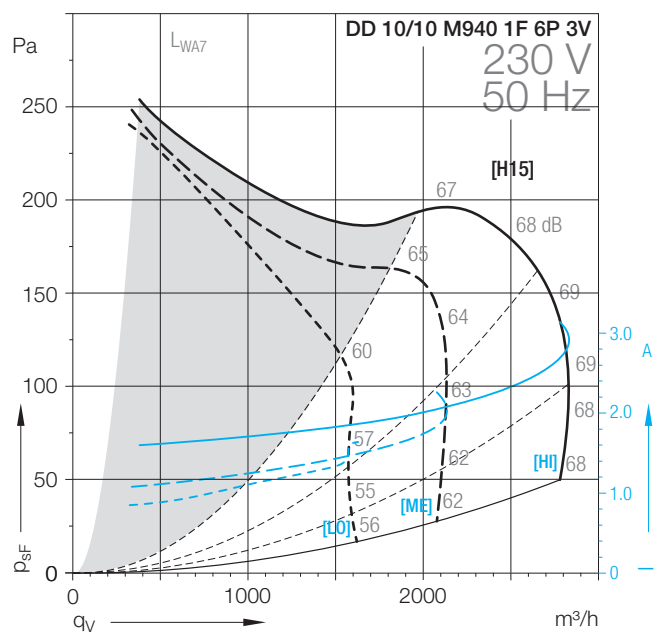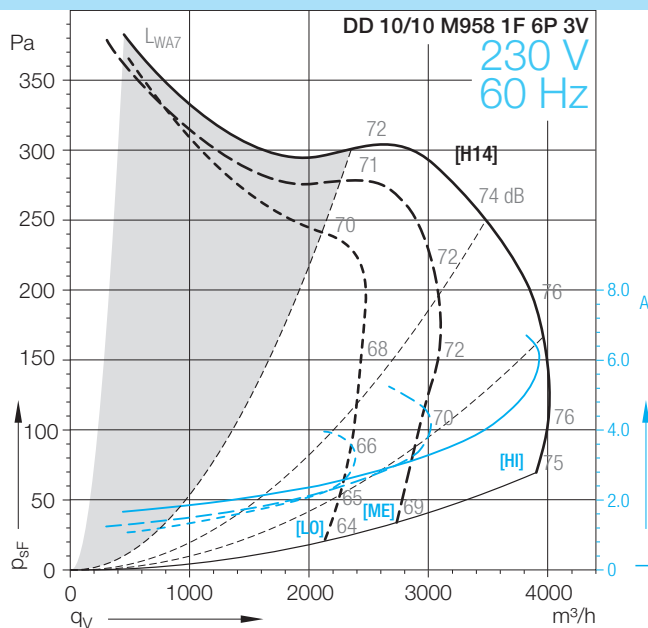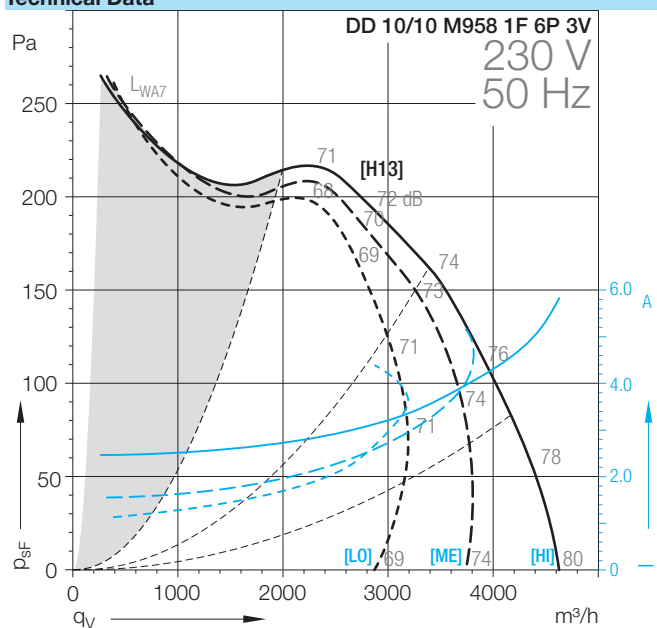

Оформить
Заказ

DD-10/10

Technical Data

	Speed control	Curves	Nominal motor power W	Poles –	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DD 10/10										
M958 1F 6P 3V	*	[H13/H14]	500	6	1~		50/60	1155	5.7	930
M940 1F 6P 3V	*	[H15/H16]	245	6	1~		50/60	687	3	880

Technical Data


	Operating Capacitor µF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DD 10/10										
M958 1F 6P 3V	10	450	IP20	B	INT	40	21	1.2	B	6M06Z5
M940 1F 6P 3V	8	500	IP20	F	INT	40	15	1.2	B	6M06Z4

(1) = Speed controllable via Transformer
(2) = Speed controllable via TRIAC or Transformer
(3) = Speed controllable via Inverter
* = No speed control available


[HI] High speed, [ME] Medium speed, [LO] Low speed
Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Dimensions in mm, subject to change.

DD 10/10 M958 1F 6P 3V

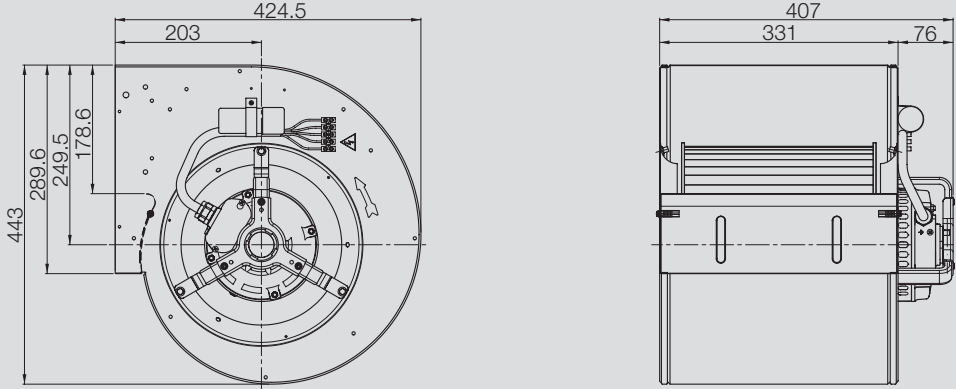

DD 10/10 M940 1F 6P 3V

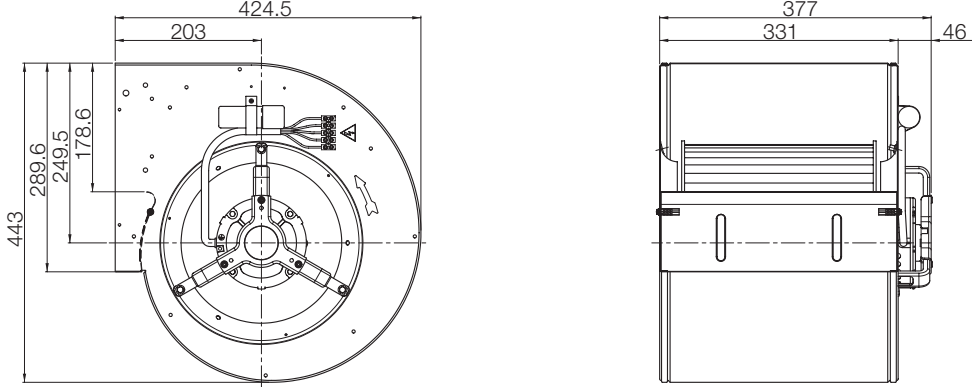

Оформить
Заказ