
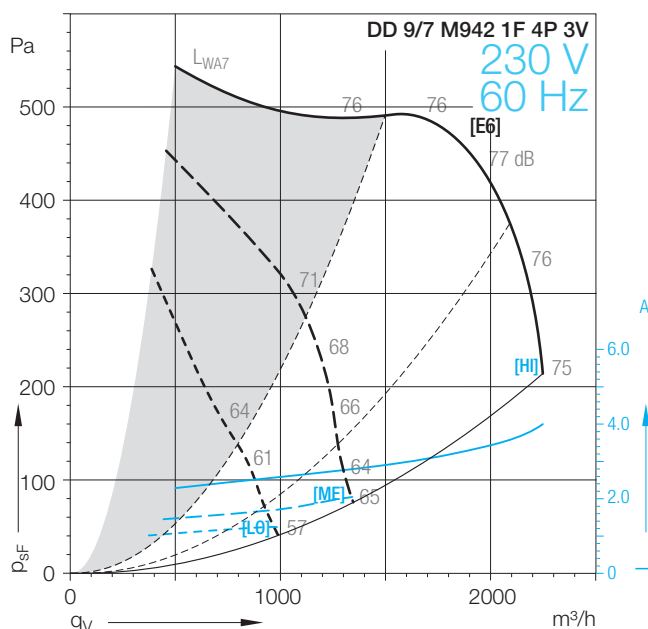
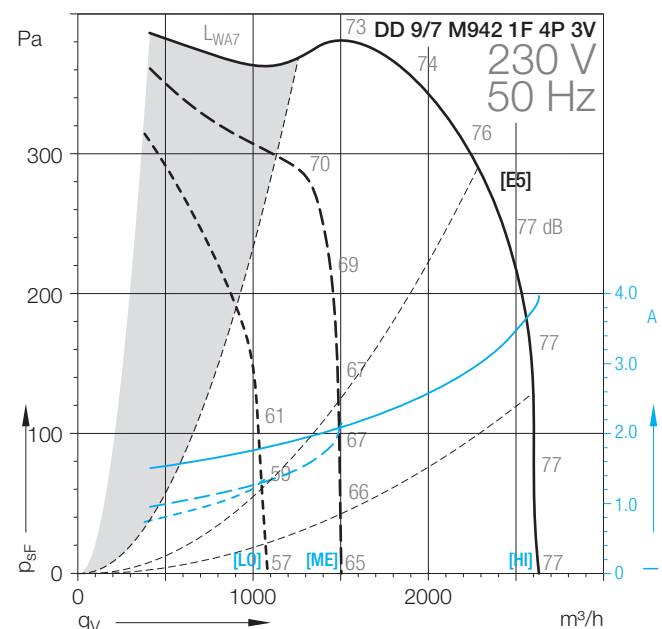
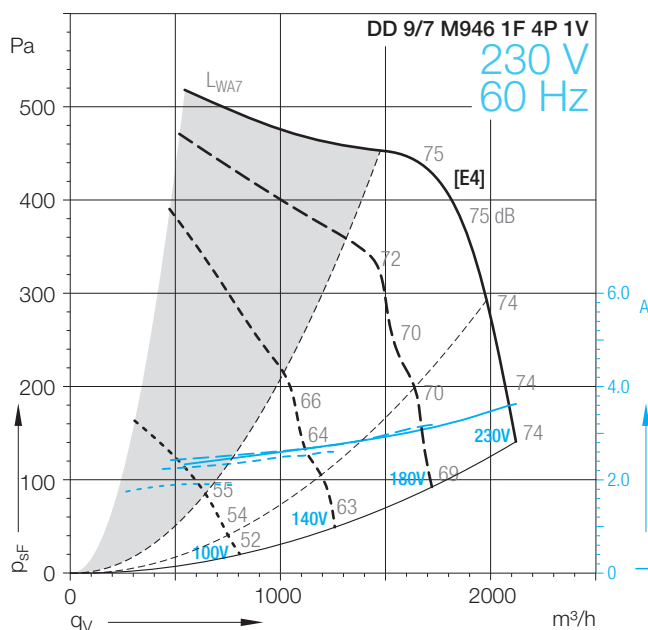
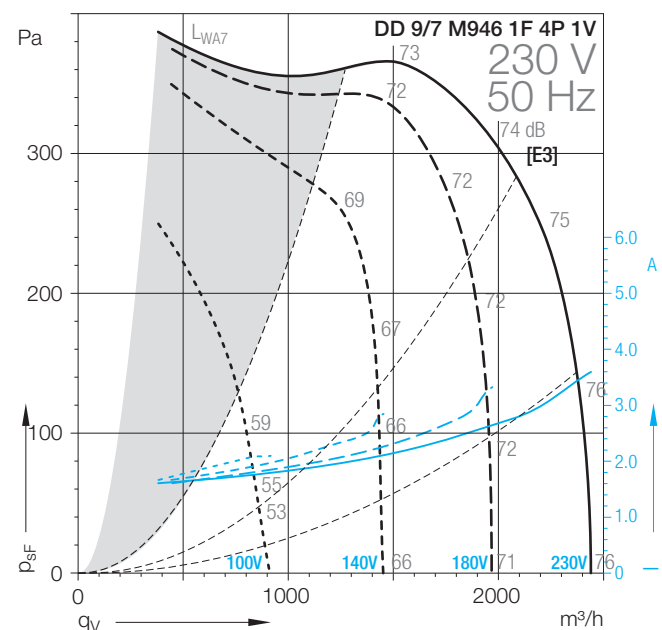
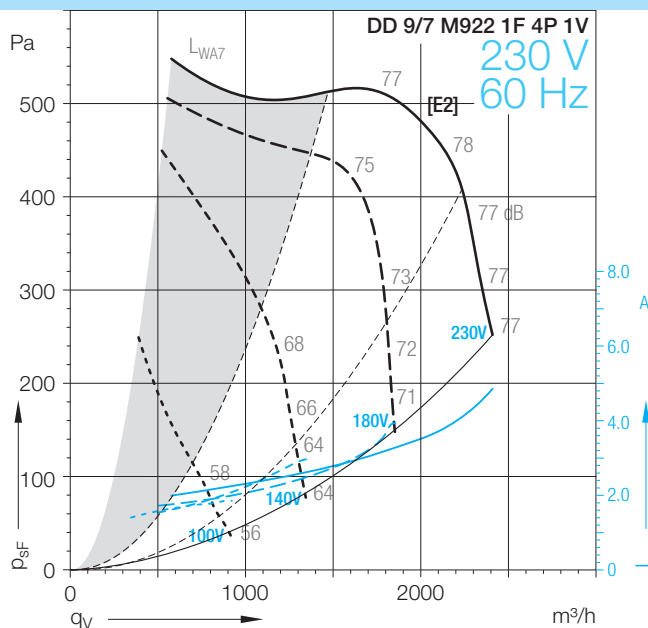


DD-9/7

Technical Data

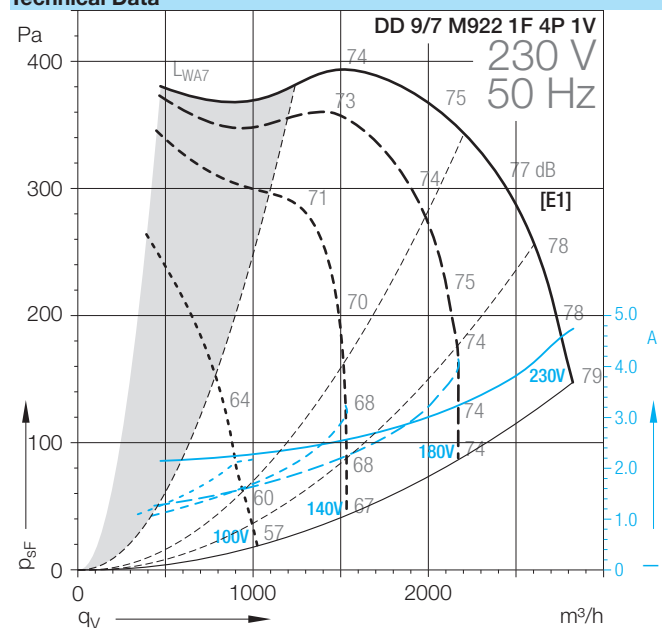

Оформить
Заказ

DD-9/7

Technical Data

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DD 9/7										
M922 1F 4P 1V	(2)	[E1/E2]	373	4	1~		50/60	1047	5	1380
M946 1F 4P 1V	(2)	[E3/E4]	300	4	1~		50/60	811	3.5	1300
M942 1F 4P 3V	*	[E5/E6]	420	4	1~		50/60	902	3.9	1200

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DD 9/7										
M922 1F 4P 1V	10	450	IP20	B	INT	40	10	1.2	B	6M06E4
M946 1F 4P 1V	10	500	IP20	B	EXT	40	10	1.2	B	6M0671
M942 1F 4P 3V	12.5	450	IP20	B	EXT	40	10	1.2	B	6M0695

(1) = Speed controllable via Transformer

(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter


* = No speed control available

[HI] High speed, [ME] Medium speed, [LO] Low speed


Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Dimensions in mm, subject to change.


DD 9/7 M922 1F 4P 1V

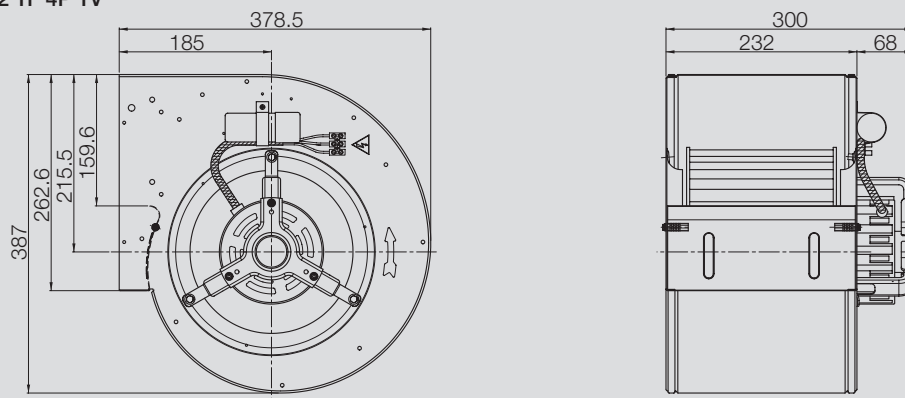

DD 9/7 M946 1F 4P 1V



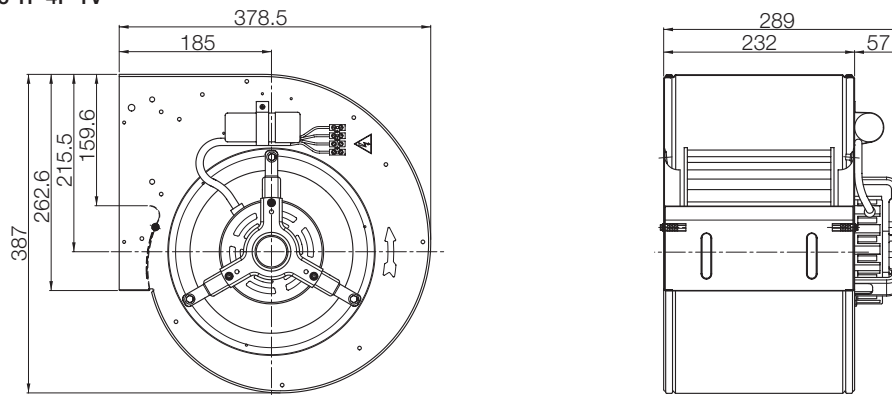


DD 9/7 M942 1F 4P 3V

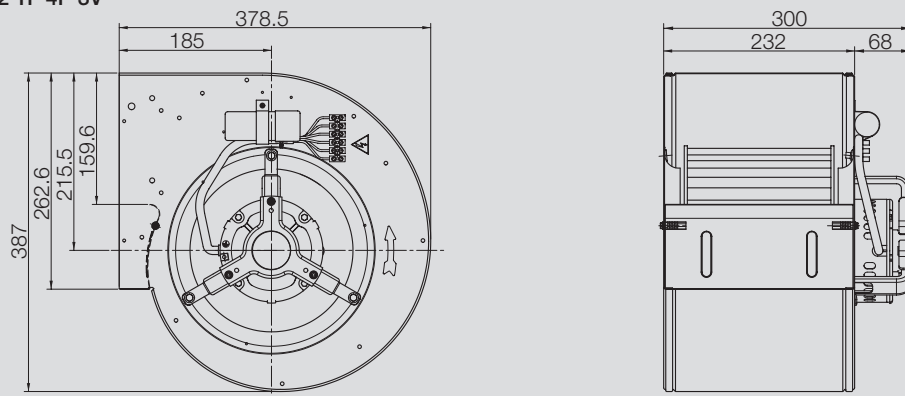Оформить
Заказ

DD-9/7

Technical Data

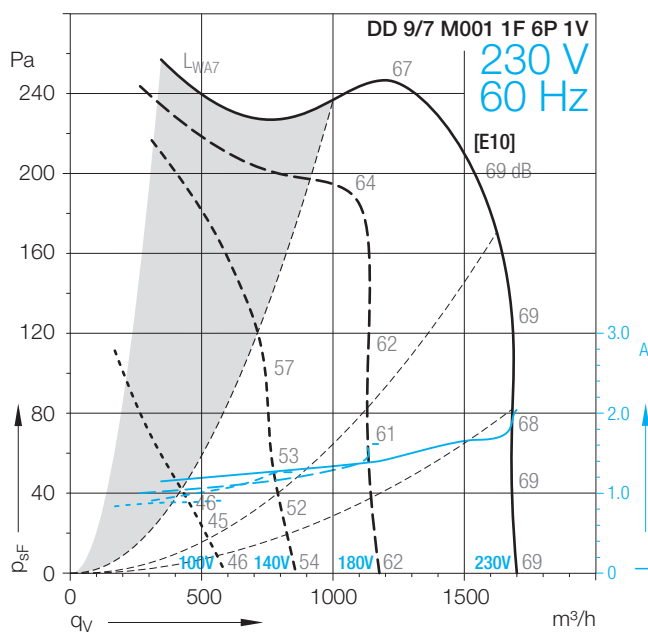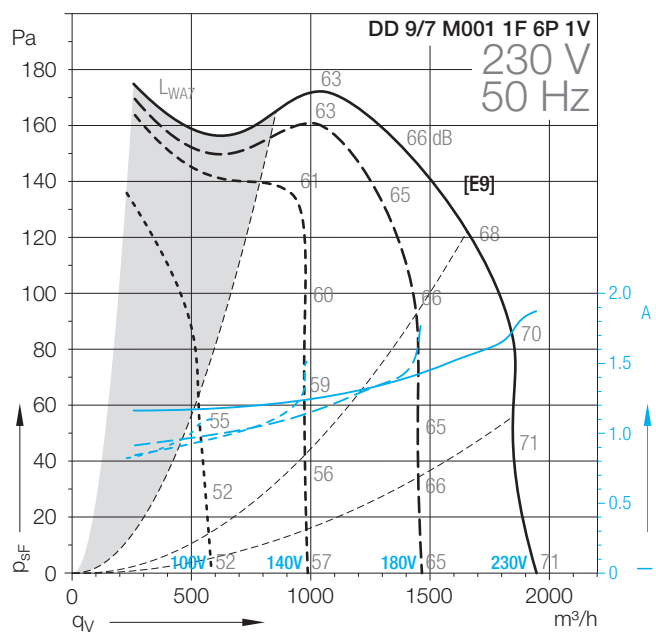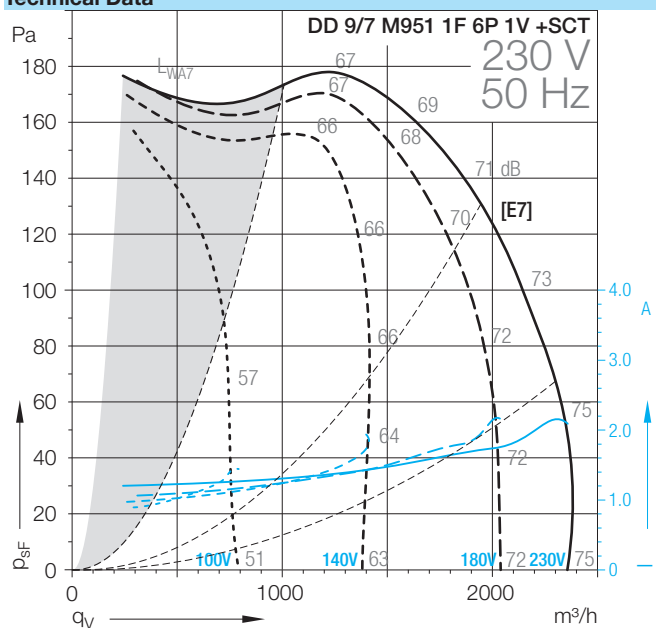

Оформить
Заказ

DD-9/7**Technical Data**

	Speed control	Curves	Nominal motor power W	Poles –	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DD 9/7										
M951 1F 6P 1V +SCT	(1)	[E7]	245	6	1~		50	454	2.1	850
M001 1F 6P 1V	(1)	[E9/E10]	147	6	1~		50/60	406	1.8	825

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DD 9/7										
M951 1F 6P 1V +SCT	8	500	IP32	F	INT	40	12	1.2	B	6M09HF
M001 1F 6P 1V	5	500	IP20	F	EXT	40	10	1.2	B	6M0306





(1) = Speed controllable via Transformer

(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter





* = No speed control available

[HI] High speed, [ME] Medium speed, [LO] Low speed

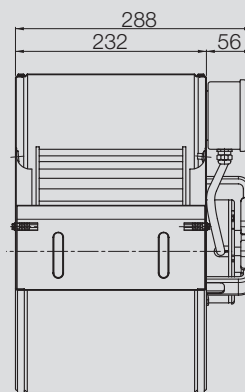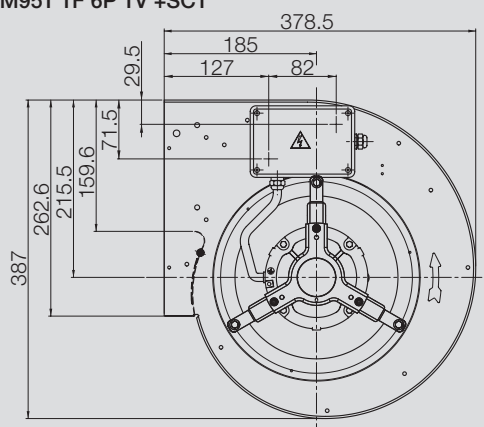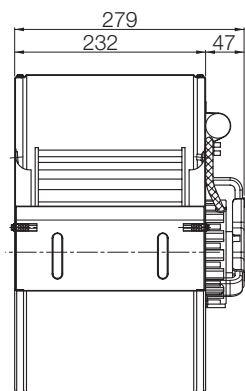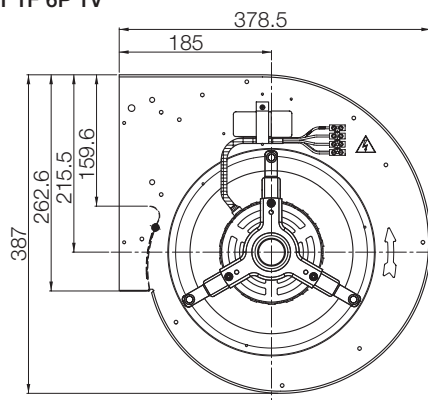Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.**Dimensions** in mm, subject to change.**DD 9/7 M951 1F 6P 1V +SCT****DD 9/7 M001 1F 6P 1V****Оформить
Заказ**

DD-9/7

Technical Data

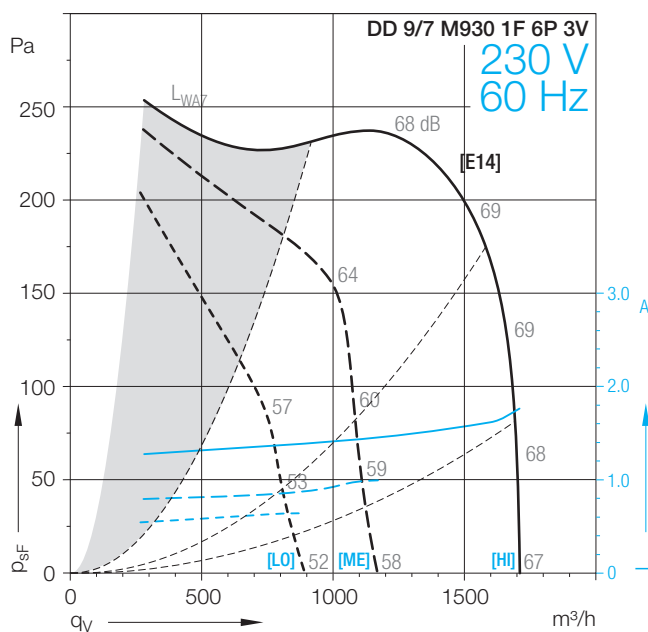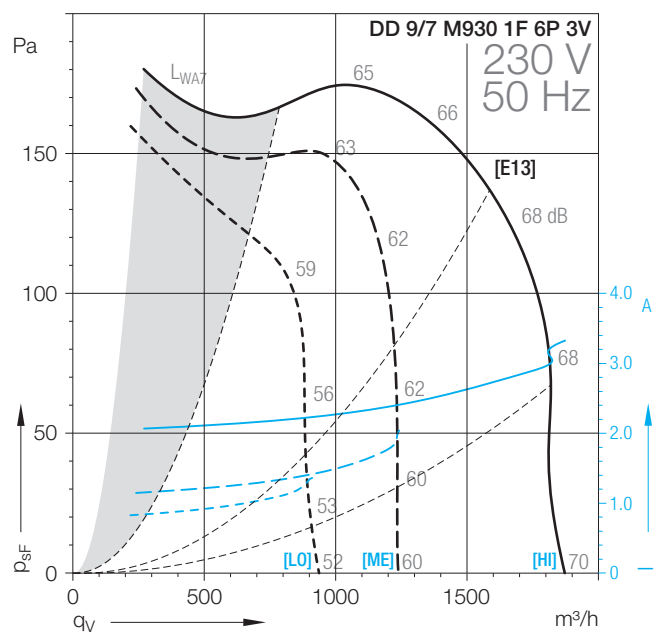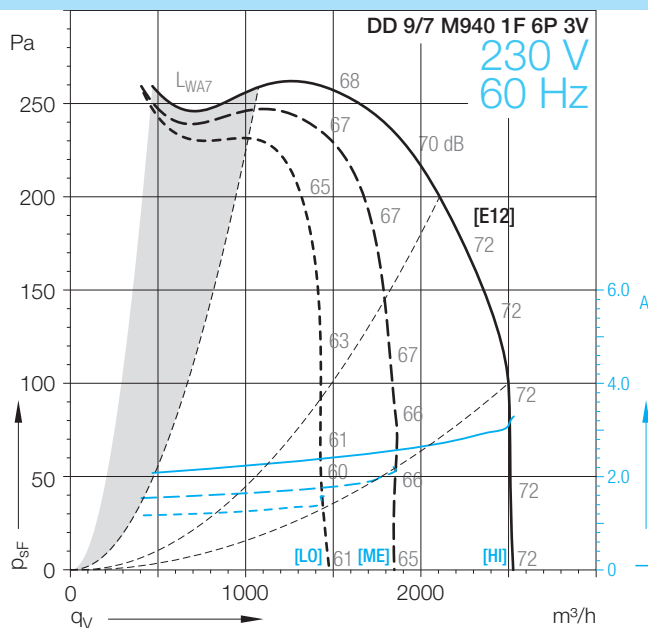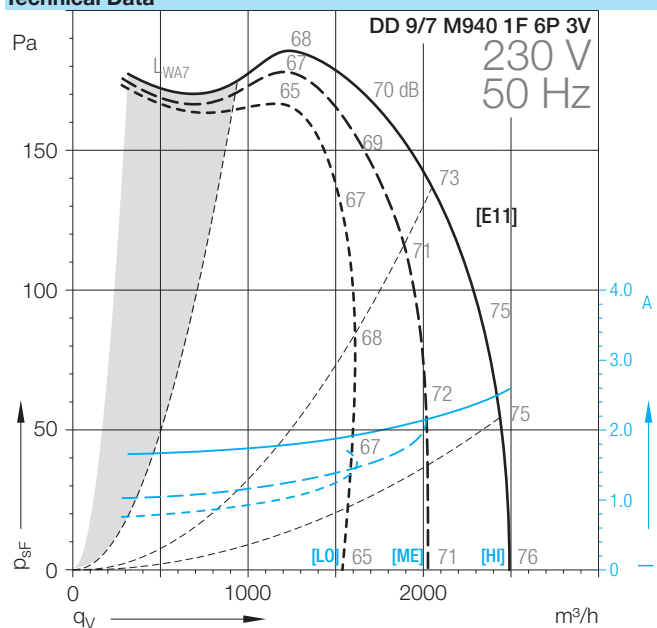

Оформить
Заказ

DD-9/7**Technical Data**

	Speed control	Curves	Nominal motor power W	Poles –	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DD 9/7										
M940 1F 6P 3V	*	[E11/E12]	245	6	1~		50/60	563	2.6	880
M930 1F 6P 3V	*	[E13/E14]	147	6	1~		50/60	386	1.7	900

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DD 9/7										
M940 1F 6P 3V	8	500	IP20	F	INT	40	10	1.2	B	6M0667
M930 1F 6P 3V	6.3	500	IP20	B	INT	40	11	1.2	B	6M06A3



(1) = Speed controllable via Transformer

(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[HI] High speed, [ME] Medium speed, [LO] Low speed

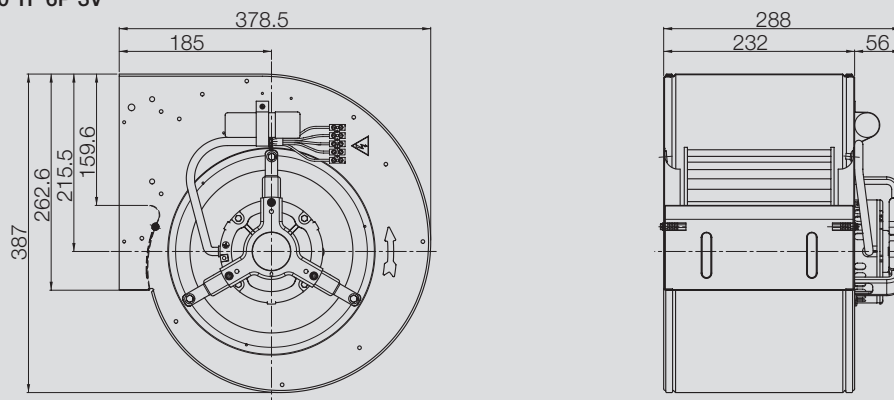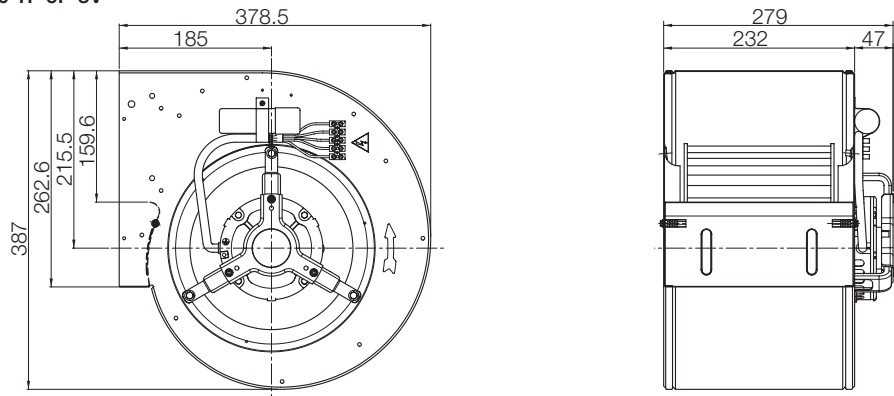Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.**Dimensions** in mm, subject to change.**DD 9/7 M940 1F 6P 3V****DD 9/7 M930 1F 6P 3V****Оформить
Заказ**