
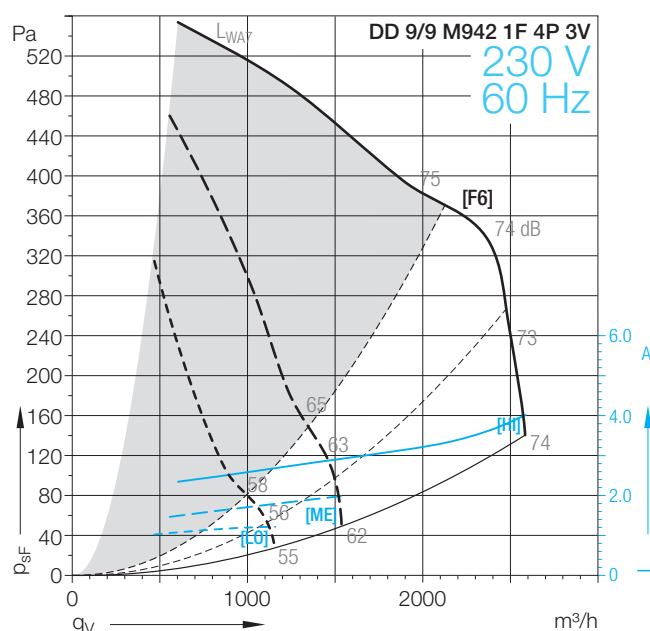
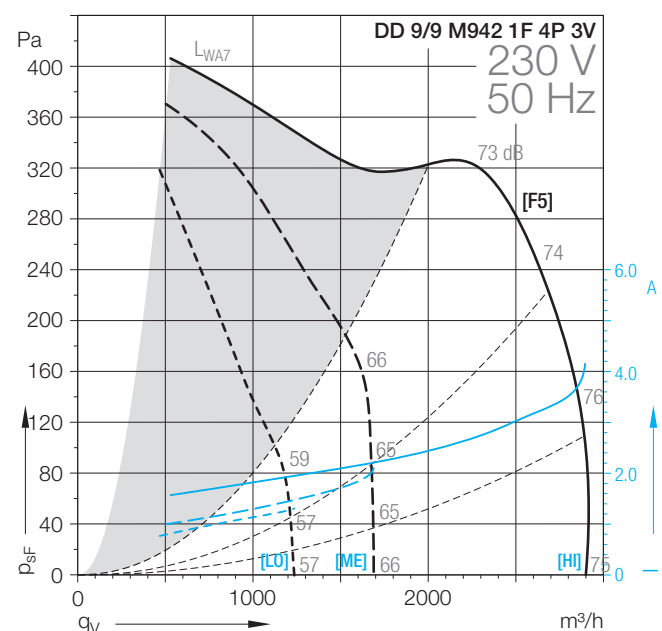
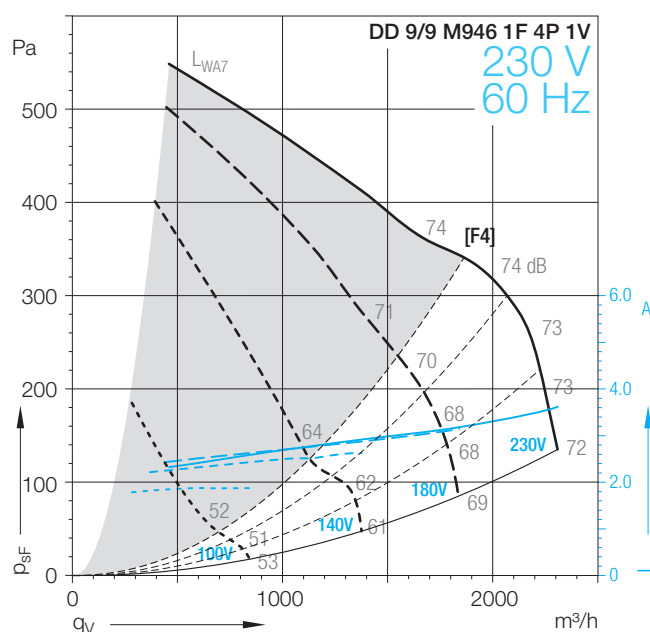
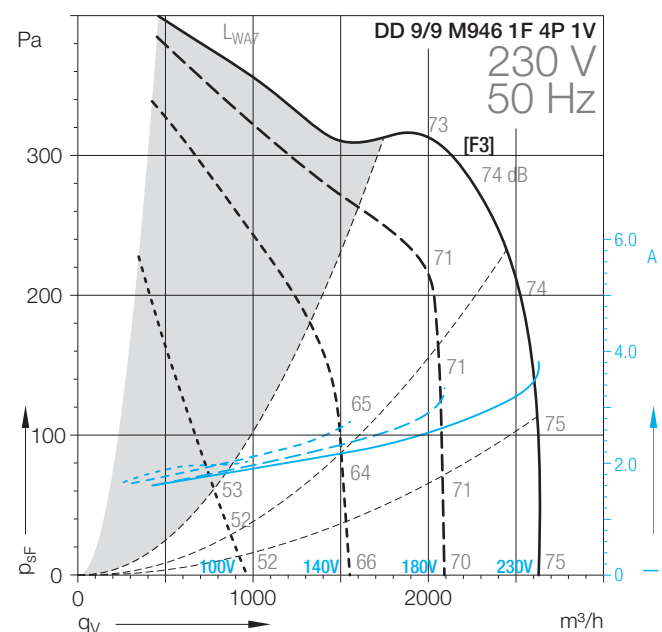
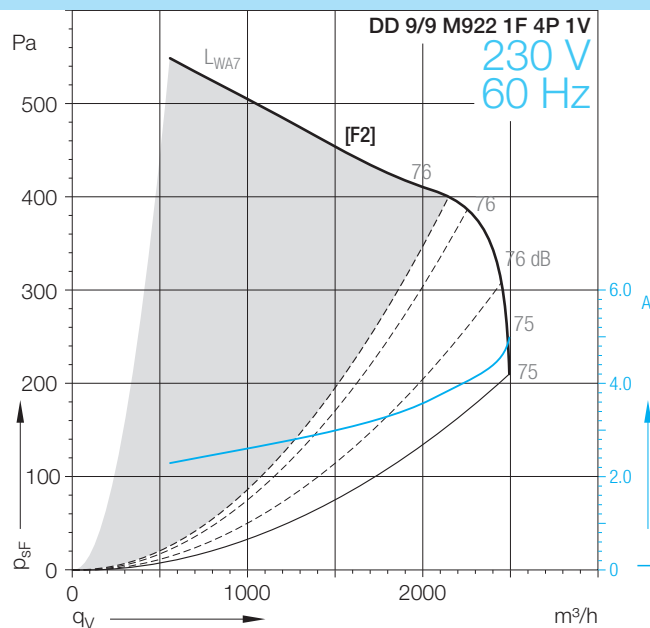


DD-9/9

Technical Data

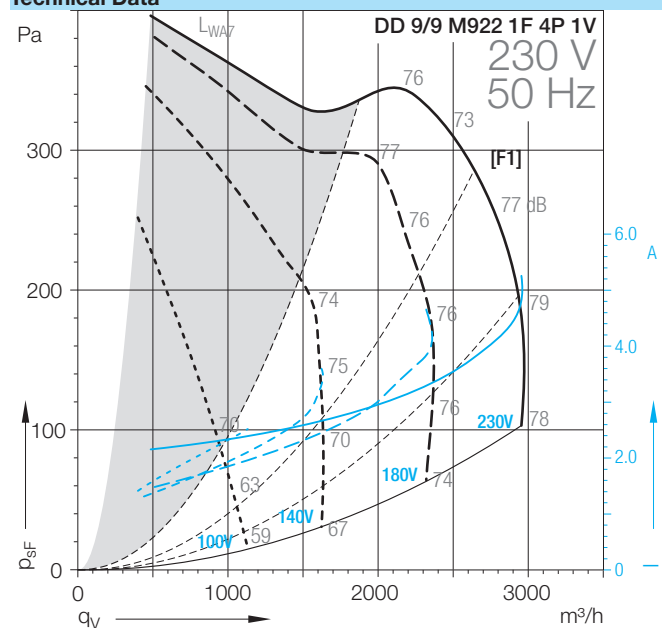

Оформить
Заказ

Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09

DD-9/9

Technical Data

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DD 9/9										
M922 1F 4P 1V	(2)	[F1/F2]	373	4	1~		50/60	1165	5.1	1380
M946 1F 4P 1V	(2)	[F3/F4]	300	4	1~		50/60	877	3.5	1300
M942 1F 4P 3V	*	[F5/F6]	420	4	1~		50/60	962	3.8	1200

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DD 9/9										
M922 1F 4P 1V	10	450	IP20	F	INT	40	13	1.2	B	6M0642
M946 1F 4P 1V	10	500	IP20	B	EXT	40	12	1.2	B	6M0661
M942 1F 4P 3V	12.5	450	IP20	B	EXT	40	14	1.2	B	6M0669

(1) = Speed controllable via Transformer

(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter


* = No speed control available

[HI] High speed, [ME] Medium speed, [LO] Low speed


Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Dimensions in mm, subject to change.


DD 9/9 M922 1F 4P 1V

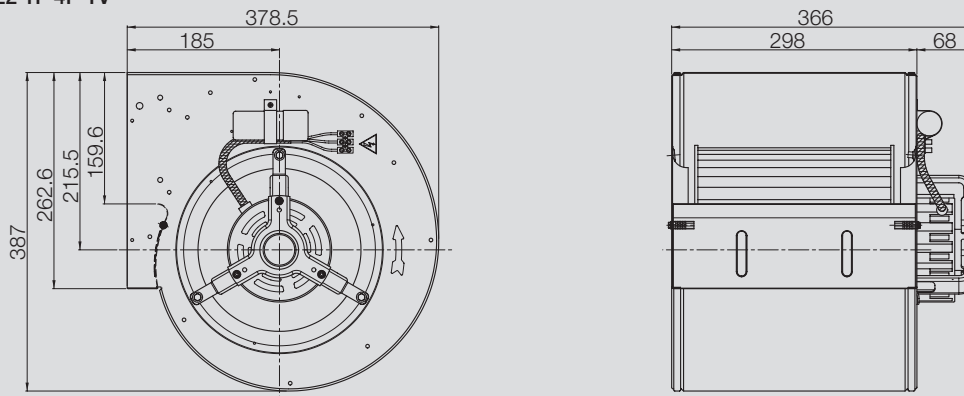

DD 9/9 M946 1F 4P 1V

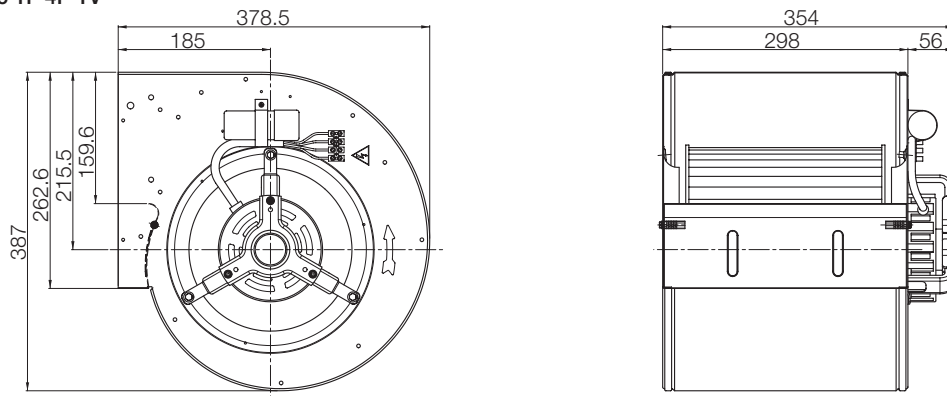






DD 9/9 M942 1F 4P 3V

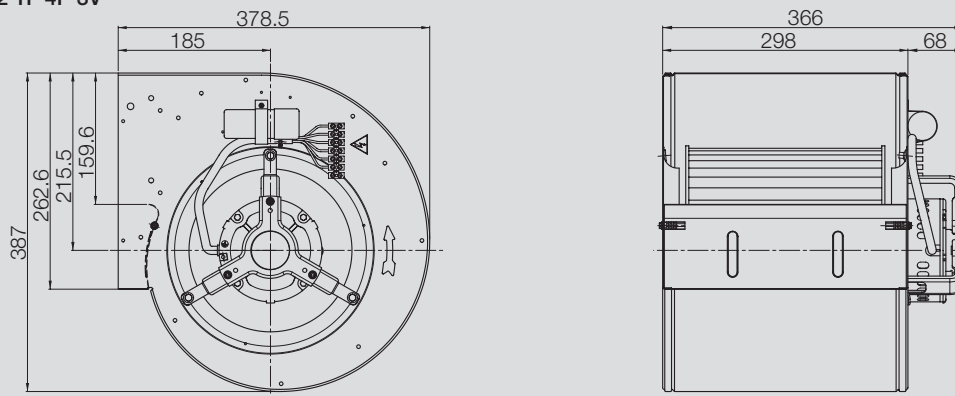

Оформить
Заказ

DD-9/9

Technical Data

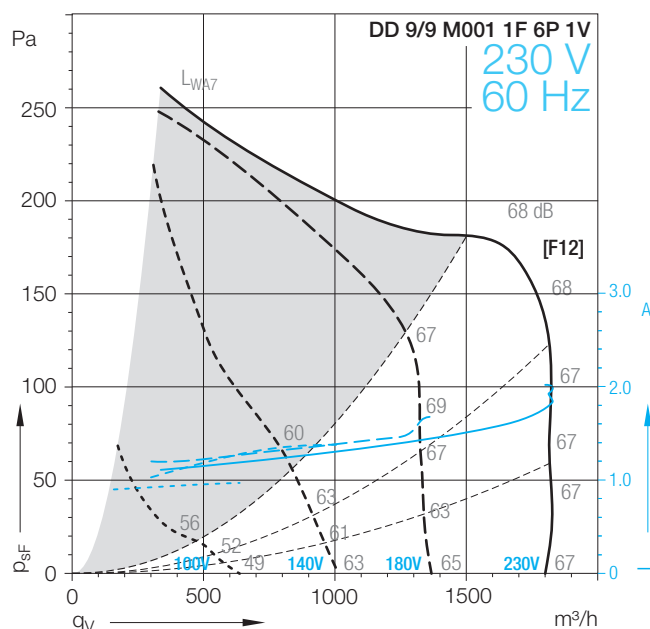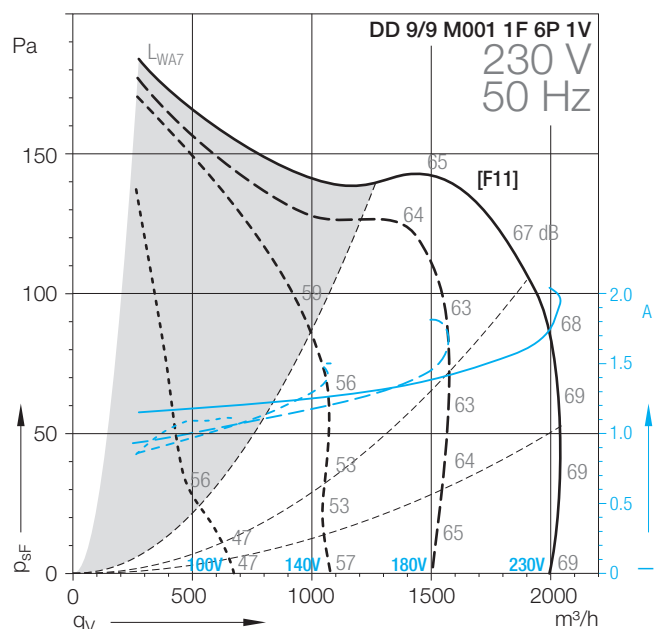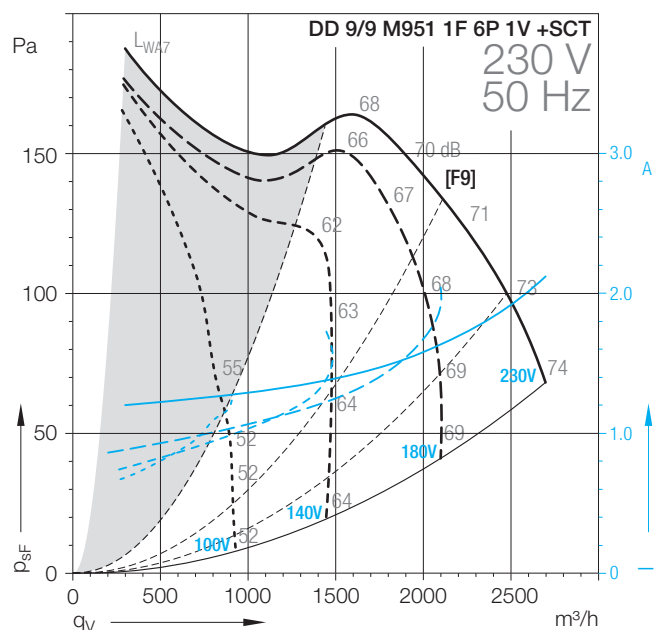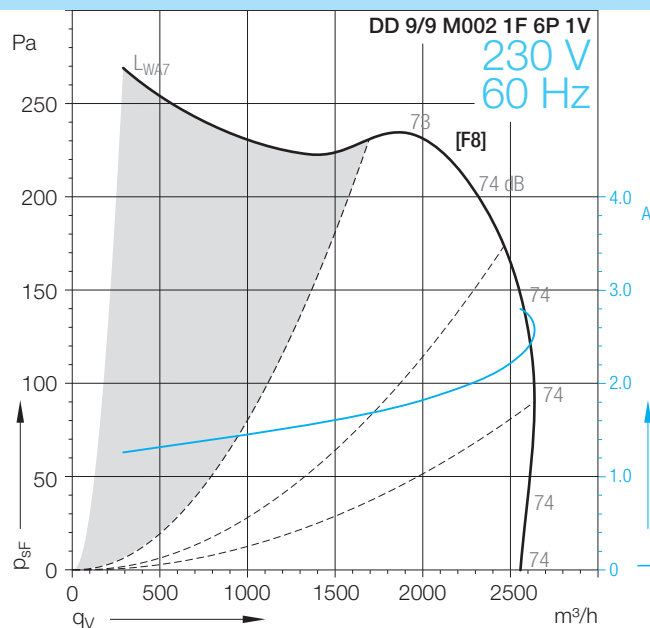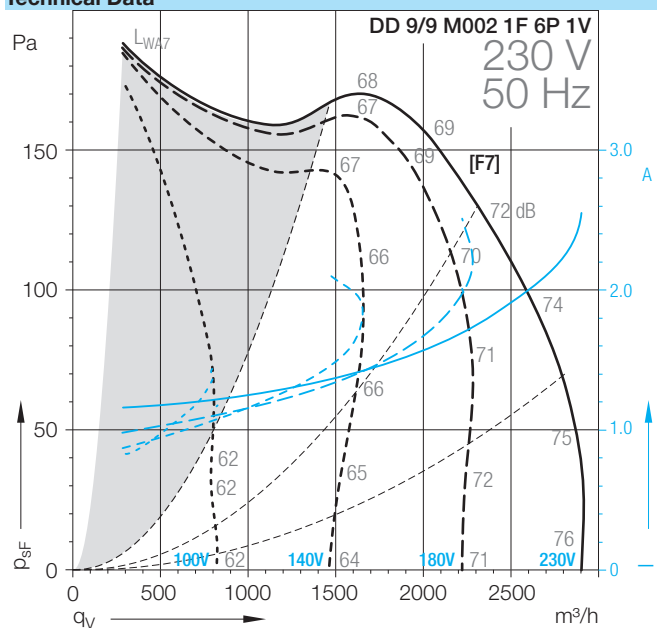

Оформить
Заказ

Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09

DD-9/9

Technical Data

	Speed control	Curves	Nominal motor power W	Poles –	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DD 9/9										
M002 1F 6P 1V	(1)	[F7/F8]	245	6	1~		50/60	549	2.6	850
M951 1F 6P 1V +SCT	(1)	[F9]	245	6	1~		50	483	2.1	850
M001 1F 6P 1V	(1)	[F11/F12]	147	6	1~		50/60	438	2	825

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DD 9/9										
M002 1F 6P 1V	8	500	IP20	F	INT	70	13	1.2	B	6M0698
M951 1F 6P 1V +SCT	8	450	IP32	B	INT	40	11	1.2	B	6M06G0
M001 1F 6P 1V	5	500	IP20	F	EXT	40	11	1.2	B	6M0308

(1) = Speed controllable via Transformer

(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter



* = No speed control available

[HI] High speed, [ME] Medium speed, [LO] Low speed



Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Dimensions in mm, subject to change.



DD 9/9 M002 1F 6P 1V

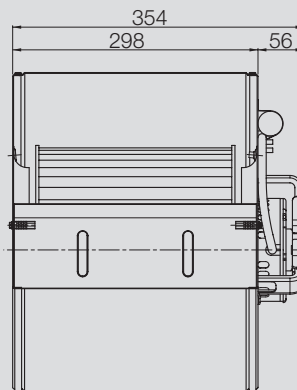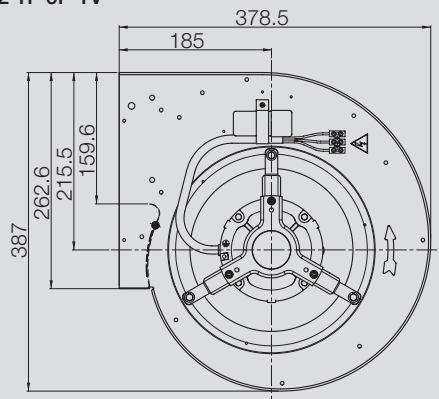

DD 9/9 M951 1F 6P 1V +SCT



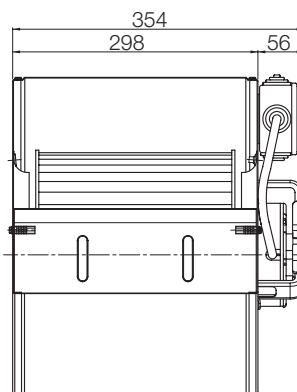
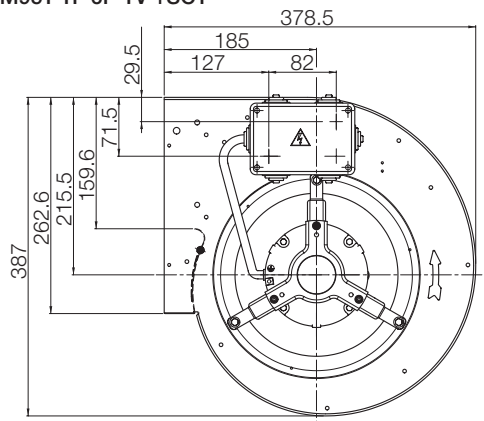


DD 9/9 M001 1F 6P 1V

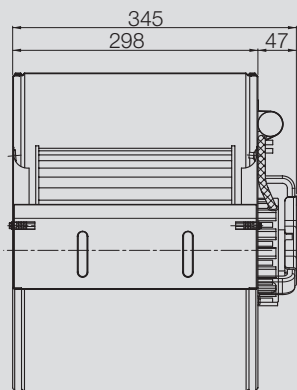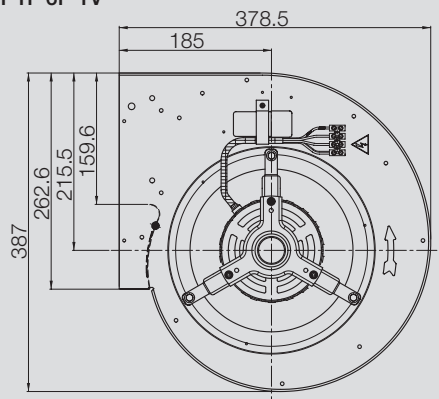Оформить
Заказ

DD-9/9

Technical Data

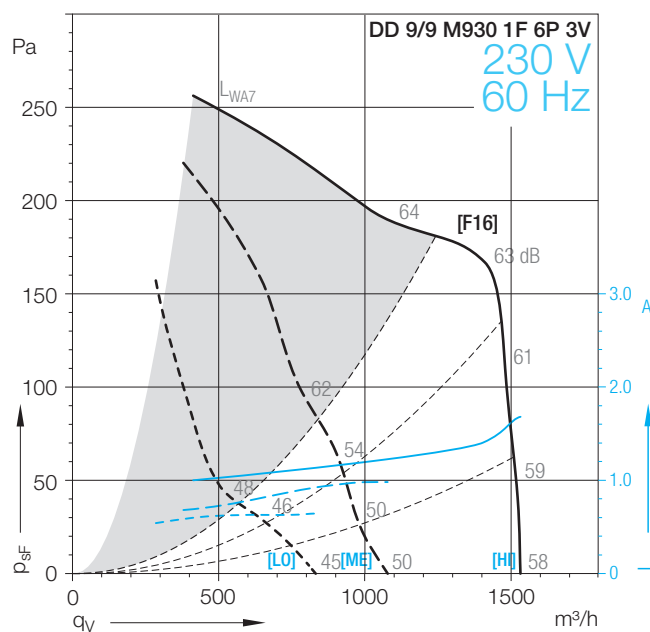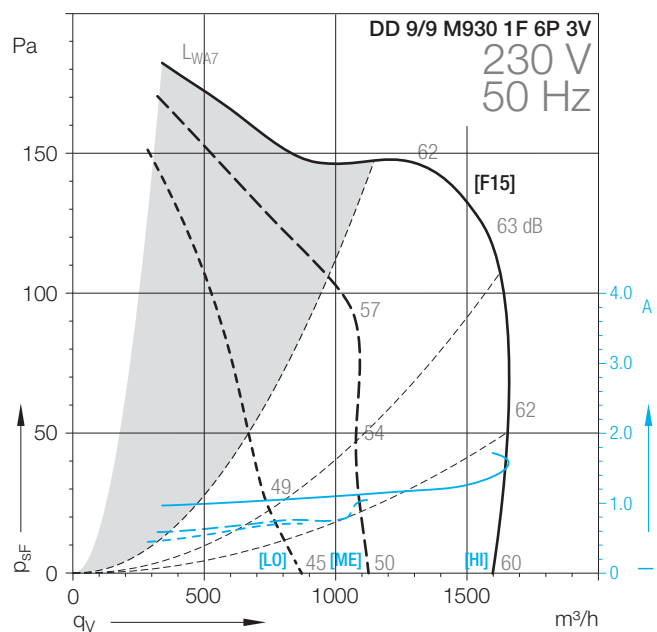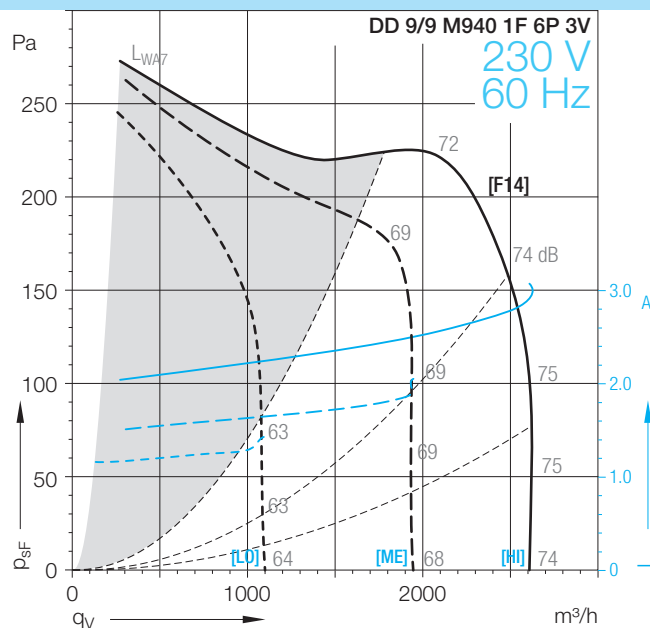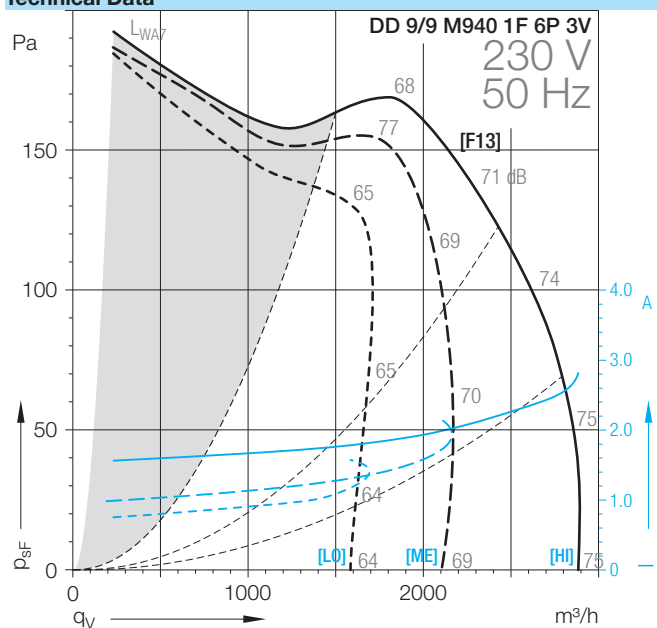

Оформить
Заказ

DD-9/9


Technical Data									
	Speed control	Curves	Nominal motor power	Poles	Phases	Connection	Mains frequency	Max. power consumption	Max. current
DD 9/9			W	—			Hz	W	A
M940 1F 6P 3V	*	[F13/F14]	245	6	1~		50/60	605	2.5
M930 1F 6P 3V	*	[F15/F16]	147	6	1~		50/60	385	1.7

Technical Data									
	Operating Capacitor	Nominal capacitor voltage	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max.	Fan weight	Density of media	Installation type (ISO 5801)
DD 9/9	µF	V				°C	kg	kg/m³	
M940 1F 6P 3V	8	500	IP20	F	INT	50	13	1.2	B
M930 1F 6P 3V	5	450	IP20	B	INT	40	11	1.2	B


(1) = Speed controllable via Transformer
(2) = Speed controllable via TRIAC or Transformer
(3) = Speed controllable via Inverter
* = No speed control available

[HI] High speed, [ME] Medium speed, [LO] Low speed
Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Dimensions in mm, subject to change.
DD 9/9 M940 1F 6P 3V

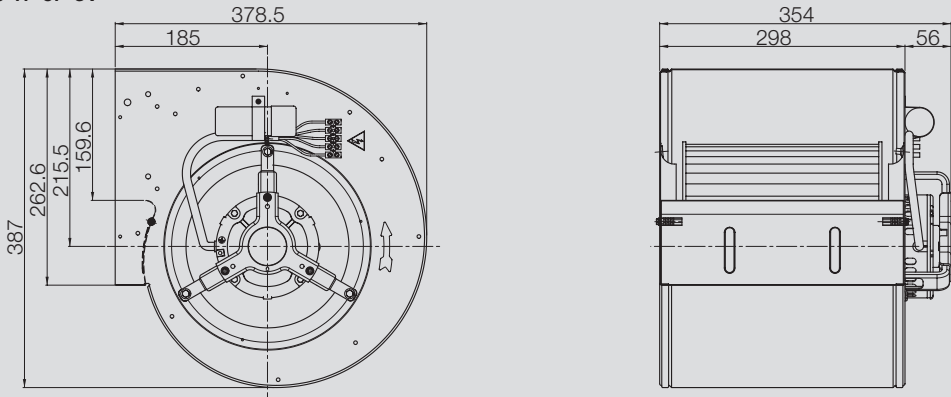

DD 9/9 M930 1F 6P 3V

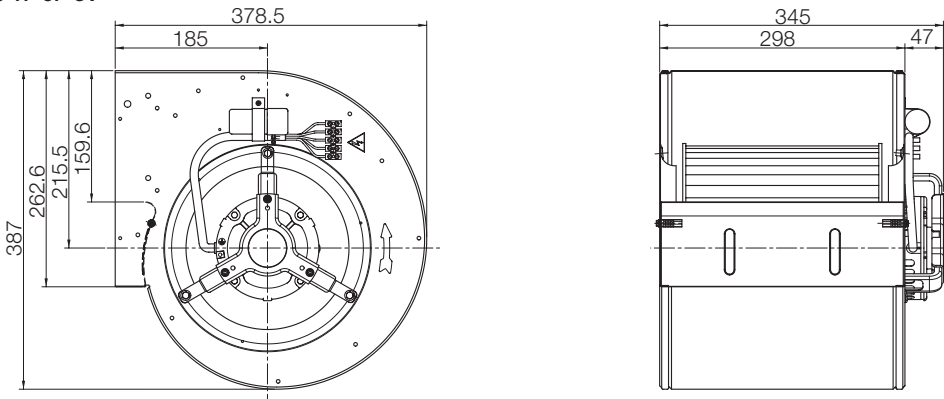

Оформить
Заказ